October 28, 2026

Addendum No. 3

Project:	Fire Station No. 42
Address:	XXXX Ranch Rd. 12 Wimberley, Texas 78676
Client:	Hays County ESD #4/Wimberley Fire Rescue
Architect:	Martinez Architects



martinez
ARCHITECTS

This Addendum forms a part of the Contract Documents and modifies the original Bidding Documents and/or prior Addenda as noted below. All conditions, requirements, materials and workmanship shall be satisfied as described in the Contract Documents unless specifically stated otherwise. This Addendum consists of the attached contract documents, specifications, and drawings as listed and described below, dated 10.28.2026.

Revisions to Architectural Construction Documents:

1. **Drawing Sheet A-101 – OVERALL FLOOR PLAN**
   a. Add keynote 265 and note location by main entry door.
2. **Drawing Sheet A-151 – FLOOR FINISH PLAN**
   a. Floor tile-2 has been removed, and Interior finish schedule has been revised
3. **Drawing Sheet A-221 – INTERIOR ELEVATIONS**
   a. Replace sheet in its entirety. Interior finishes schedule has been revised and wall paint 3 has been removed.
4. **Drawing Sheet A-222 – INTERIOR ELEVATIONS**
   a. Replace sheet in its entirety. Interior finishes schedule has been revised and wall paint 3 has been removed.
5. **Drawing Sheet A-223 – INTERIOR ELEVATIONS**
   a. Interior finishes schedule has been revised
6. **Drawing Sheet A-224 – INTERIOR ELEVATIONS**
   a. Replace sheet in its entirety. Interior finishes schedule has been revised and wall paint 3 has been removed.
7. **Drawing Sheet A-401 – LARGE SCALE TOILET PLAN**
   a. Replace sheet in its entirety. Interior finishes schedule has been revised and wall paint 3 has been removed.
8. **Drawing Sheet A-421 – KITCHEN PLANS**
   a. Replace sheet in its entirety. Interior finishes schedule has been revised and wall paint 3 has been removed.
9. **Drawing Sheet A-421 – KITCHEN PLANS**
   a. Wall Paint 3 has been removed, and wall paint 1 & 2 has been revised on the interior finish legend. Floor tile 2 has been removed from the interior finish schedule. The tile of plastic laminate 3 and the representation for wall paint 2 & 3 on the interior finish schedule has been revised.
10. **Drawing Sheet A-601 – DOOR, WINDOW & LOUVER SCHEDULES**
    a. Add one-way ballistic film to glazing types
    b. Note for ballistic film on specified glazing
    c. Revise width and height for select doors in door schedule
11. **Drawing Sheet A-811 – SIGNAGE DETAILS**
    a. Add detail D1





GENERAL NOTES

A. **SEE SHEET A-141 FOR PARTITION TYPES.**
B. BRACE ALL STUD WALLS BACK TO STRUCTURE AS REQ'D. STUD MANUFACTURER SHALL GAUGE ALL STUDS PER APPLICATION. SUBMIT ENGINEERED SHOP DRAWINGS FOR APPROVAL.
C. EXTEND & SEAL ALL FIRE RATED WALLS TO DECK. ENSURE AIR-TIGHT SEAL @ ALL EXTERIOR WALLS.
D. COMPLETELY FILL ALL EXTERIOR WALLS WITH INSULATION.
E. CONTRACTOR TO PROVIDE & INSTALL FIRE DEPARTMENT ACCESS BOX. COORDINATE BOX REQUIREMENTS AND MOUNTING LOCATION WITH FIRE MARSHAL PRIOR TO INSTALLATION. APPLICATION & APPROVAL REQ'D.
F. PROVIDE GROMMETS AT ALL CASEWORK KNEE SPACES.
G. ALL BASE CABINET FILE DRAWERS TO BE CONSTRUCTED WITH PROPER WIDTH/DEPTH SO AS TO HOUSE FILING SYSTEM WITH SIDE RAILS TO ACCEPT HANGING FILE SYSTEM. SUBMIT DRAWER MOCKUP FOR ARCHITECT'S REVIEW AND APPROVAL PRIOR TO CONSTRUCTION/ INSTALLATION.
H. SUBSTITUTE DUROCK CEMENT BOARD FOR GYPSUM BOARD @ ALL CERAMIC WALL TILE LOCATIONS.
I. FULL HT. PLASTIC CORNER GUARDS TO BE PROVIDED AT ALL GYP. BD. CORNERS EXCEPT THOSE AT COLUMN FURROUTS.
J. CONTRACTOR SHALL COORDINATE THE LOCATION OF ALL ELECTRICAL DEVICES & PLUMBING WITH MILLWORK, LOCKERS, ETC. ALL ELECTRICAL DEVICES & PLUMBING NOT COORDINATED WITH MILLWORK, LOCKERS, ETC. SHALL BE RELOCATED BY THE CONTRACTOR.
K. REFER TO SHEET G-201 FOR TYPICAL DOOR CLEARANCES. ALL DOORS SHALL MEET THE REQUIREMENTS OF THIS DRAWING. IF A DOOR IS FOUND THAT DOES NOT MEET THESE REQUIREMENTS, CONTACT THE ARCHITECT PRIOR TO CONSTRUCTION.
L. PROVIDE WOOD BLOCKING IN WALLS AS REQUIRED AT ALL HANDRAILS, MILLWORK, WALL-MOUNTED EQUIPMENT, ETC. - VERIFY LOCATION OF ALL OWNER PROVIDED EQUIPMENT THAT WILL REQUIRE BLOCKING.
M. G.C. TO COORDINATE ALL OWNER FURNISHED EQUIPMENT MODELS w/ MEP INFRASTRUCTURE.
N. SLOPE AT FLOOR DRAINS SHALL NOT EXCEED 1:48 SLOPE IN AREAS OF ACCESSIBLE PATH OF TRAVEL.

KEYNOTES

#	
110	CONCRETE-FILLED STEEL PIPE BOLLARDS (D.O.T. YELLOW PAINTED BOLLARDS & PROPANE TANK; GC TO PROVIDE SAMPLES)
140	CONCRETE APP BAY FOOTING
203	WALL MOUNTED FLAT SCRN TV
206	FIRE EXTINGUISHER
264	ROLLER SHADES
265	DEDICATION PLAQUE

LEGEND

WALL LEGEND

MTL. STUD WALL

TRUE NORTH PROJECT NORTH

A1 OVERALL FLOOR PLAN - LEVEL 1
SCALE: 1/8" = 1'-0"

PROFESSIONAL SEAL

REGISTERED ARCHITECT RICHARD J. MARTINEZ 23149 STATE OF TEXAS

LOGO/CONTACT

martinez ARCHITECTS

Martinez Architect, LP
8911 N Capital of Texas Hwy
Suite 4200
Austin, TX 78759
737.900.5166

DESIGN TEAM

Architectural
Martinez Architects

Civil
Hill Country Civil

Landscape
Evergreen Landscape Group

Structural
Matrix Structural

MEP
Emerald MEP

Technology
Imagine IT

Alerting
WestNET

STATION #42

Hays County ESD #4
xxxxx
Wimberley, TX 78676

PROJECT No: MA 25016
DATE: 20-OCT-2026

ISSUE #


1	100% DD	06-JAN-2026
2	25% CD	25-FEB-2026
3	75% CD	06-APR-2026
4	98% CD	04-MAY-2026
5	IFP	01-JUN-2026
6	IFB	20-OCT-2026
7	ADDENDUM 3	28-OCT-2026

OVERALL FLOOR PLAN

A-101



A1 FLOOR FINISH PLAN - LEVEL 1
SCALE: 1/8" = 1'-0"

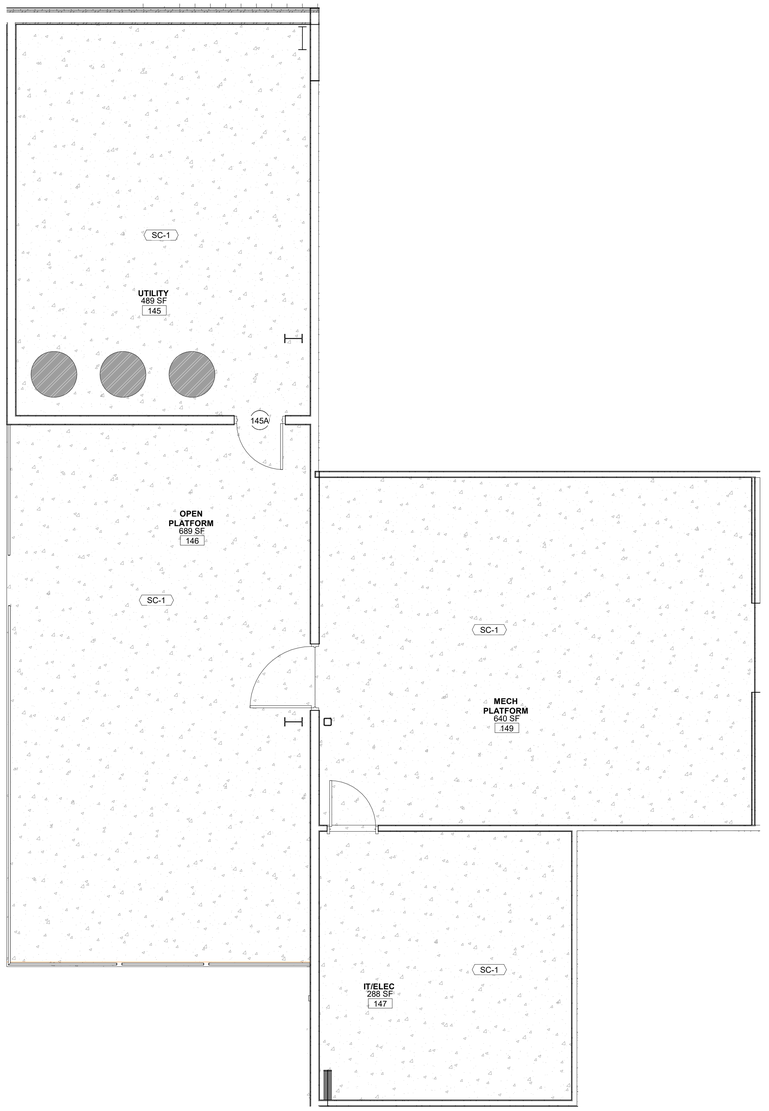

A3 MECH MEZZANINE ENLARGED PLAN FINISH PLAN
SCALE: 1/4" = 1'-0"

PROJECT NORTH

GENERAL NOTES

1. ALL FINISH MATERIAL COLORS/PATTERNS/STYLES TO BE DETERMINED BY ARCHITECT FROM MANUFACTURER'S FULL RANGE OF COLORS.
2. ALL HOLLOW METAL DOOR FRAMES & DOORS SHALL BE PAINTED (PT-2).
3. RE: SPECIFICATIONS FOR ADDITIONAL FINISH INFORMATION & REQUIREMENTS.
4. ALL EXPOSED STEEL FRAMING (INTERIOR & EXTERIOR) SHALL BE PAINTED (PT-4).
5. PROVIDE FULL HEIGHT CORNER GUARDS AT ALL OUTSIDE GYPSUMCORNERS.
6. ALL CABINETS SHALL BE WOOD LAMINATED (U.N.O.)
7. ALL COUNTERTOPS SHALL BE SOLID SURFACE (U.N.O.)
8. RE: A-161 FOR EXTENT AND HEIGHT OF CEILING FURRDOWNS / TRANSITIONS.
9. COLORS IN DRAWINGS AND LEGENDS ARE FOR REPRESENTATION PURPOSES ONLY AND DO NOT DEPICT ACTUAL FINISHES.
10. ALL WALLS SHALL RECEIVE FIELD PAINT COLOR, "PT-1" (U.N.O., RE: FINISH PLAN)
11. ALL GYP. WALLS SHALL RECEIVE "WB-1".
12. INTERIOR CMU WALLS SHALL BE PAINTED (PT-1) AND SHALL NOT RECEIVE WALL BASE.
13. F.F.& E. SHOWN AS BASIS OF DESIGN. (BY OWNER, U.N.O.)
14. ALL DORM LOCKER STORAGE FURRING SHALL BE PAINTED (PT-2, U.N.O.)
15. ALL FLOOR & WALL MATERIAL TRANSITIONS SHALL RECEIVE METAL SCHLUTER TRIM.
16. ALL RESTROOM AND SHOWER ROOMS WALLS SHALL RECEIVE WALL TILE (WT-1) TO 6' 0" A.F.F.
17. PROVIDE SCHLUTER TRIM FOR RESTROOM & SHOWER CORNER CONDITIONS AND A TOP CAP FOR TRANSITIONS TO GYP BD.
18. 2X6 IN-WALL BLOCKING FOR GEAR LOCKERS BY CONTRACTOR. GC TO COORDINATE MOUNTING HEIGHT WITH OWNER.

FINISH SCHEDULE

INTERIOR FINISHES

FLOOR

LUXURY VINYL TILE 1 (LVT-1)
- MANUFACTURER: TARKETT
- COLLECTION: EVENT + WOOD
- MODEL: CRAFTED PLANK
- SIZE: 6" X 48"
- COLOR: PACIFIC WALNUT

LUXURY VINYL TILE 2 (LVT-2)
- MANUFACTURER: TARKETT
- COLLECTION: EVENT + WOOD
- MODEL: CRAFTED PLANK
- SIZE: 6" X 48"
- COLOR: ANTIQUE WALNUT

FLOOR TILE 1 (FT-1)
- MANUFACTURER: DALTILE
- COLLECTION: NATURAL STONE MARBLE
- MODEL: FIRST SNOW ELEGANCE SQUARE
- SIZE: 12" X 12"
- COLOR: M190

RUBBER FLOORING (RF-1)
- MANUFACTURER: FLEXCO
- COLLECTION: PRIME SPORTS
- MODEL: STARLIGHT PSF-204 RUBBER TILE
- SIZE: 3/8" GAUGE
- COLOR: BLACK W/ RED

SEALED CONCRETE (SC-1)
(RE: SPECS)

WALL

WALL PAINT 1 (WP-1) | FIELD PAINT
- MANUFACTURER: SHERWIN WILLIAMS
- COLOR: 231 / 216 / 189
- NAME: ROYCROFT VELLUM - SW 2833

WALL PAINT 2 (WP-2)
- MANUFACTURER: SHERWIN WILLIAMS
- COLOR: 193 / 164 / 133
- NAME: FARRO - SW 9103

WALL TILE 1 (WT-1)
- MANUFACTURER: DALTILE
- COLLECTION: FONTE
- MODEL: PIER WHITE
- SIZE: 12" X 24"
- COLOR: M012
- PATTERN: RECTANGLE

WALL TILE 2 (WT-2)
- MANUFACTURER: DALTILE
- TYPE: REMEDY
- MODEL: TONIC
- COLOR: RD26
- SIZE: 1" X 10"
- PATTERN: RECTANGLE

WALL BASE 1 (WB-1)
- MANUFACTURER: ROPPE / 700 SERIES
- COLOR: 52 / 35 / 32
- NAME: 110 BROWN

HM DOOR PAINT 1 (MTL-1)
- MANUFACTURER: SHERWIN WILLIAMS
- COLOR: 79 / 52 / 38
- NAME: FRENCH ROAST - SW 6069

FIBER REINFORCED PLASTIC (FRP-1)
- MANUFACTURER: USFRP
- COLOR: BRIGHT WHITE
- TYPE: CLASS-A (PEBBLED)

STAINLESS STEEL 1 (S STL-1)
REFER TO SPECS

MILLWORK

PLASTIC LAMINATE 1 (PL-1)
- MANUFACTURER: WILSONART
- COLOR: 72, 60, 48
- NAME: FREMONT OAK

PLASTIC LAMINATE 2 (PL-2)
- MANUFACTURER: WILSONART
- COLOR: 169, 158, 139
- NAME: HARBOR HICKORY

PLASTIC LAMINATE 3 (PL-3)
- MANUFACTURER: WILSONART
- COLOR: 154, 137, 118
- NAME: FRENCH PEAR

COUNTER TOP 1 (CTOP-1)
- MANUFACTURER: WILSONART
- COLOR: 243, 248, 243
- NAME: DESIGNER WHITE D354SL

GRANITE COUNTER TOP (CTOP-2)
- (RE: CONTRACTOR)
- CONTRACTOR FURNISHED, CONTRACTOR INSTALLED

CEILING


2 X 2 DROP CEILING MILDEW RESISTANT (DC-1)
- MANUFACTURER:
- COLLECTION:
- COLOR:

2 X 2 DROP CEILING (DC-2)
- MANUFACTURER:
- COLLECTION:
- COLOR:

GYPSUM CEILING (GC-1)
- MANUFACTURER:
- COLLECTION:
- COLOR: PT-1

MILDEW RESISTANT GYPSUM CEILING (GC-2)
- MANUFACTURER:
- COLLECTION:
- COLOR: PT-1

PROFESSIONAL SEAL



LOGO/CONTACT

martinez ARCHITECTS
Martinez Architect, LP
8911 N Capital of Texas Hwy
Suite 4200
Austin, TX 78759
737.900.5166

DESIGN TEAM

Architectural
Martinez Architects

Civil
Hill Country Civil

Landscape
Evergreen Landscape Group

Structural
Matrix Structural

MEP
Emerald MEP

Technology
Imagine IT

Alerting
WestNET

STATION #42

Hays County ESD #4
xxxxx
Wimberley, TX 78676


PROJECT No: MA 25016
DATE: 20-OCT-2026

ISSUE


1	100% DD	06-JAN-2026
2	25% CD	25-FEB-2026
3	75% CD	06-APR-2026
4	98% CD	04-MAY-2026
5	IFP	01-JUN-2026
6	IFB	20-OCT-2026
7	ADDENDUM 3	28-OCT-2026

FLOOR FINISH PLAN


A-151




E1 TV ROOM 108 EAST
SCALE: 1/4" = 1'-0"




E2 TV ROOM 108 NORTH
SCALE: 1/4" = 1'-0"




E3 TV ROOM 108 WEST
SCALE: 1/4" = 1'-0"




D1 ENTRY 100 EAST
SCALE: 1/4" = 1'-0"




D2 ENTRY 100 NORTH
SCALE: 1/4" = 1'-0"




D3 ENTRY 100 SOUTH
SCALE: 1/4" = 1'-0"




D4 ENTRY 100 WEST
SCALE: 1/4" = 1'-0"




C1 DORM 119 NORTH
SCALE: 1/4" = 1'-0"




C2 DORM 119 EAST
SCALE: 1/4" = 1'-0"




C3 DORM 119 WEST
SCALE: 1/4" = 1'-0"




C4 DORM 119 SOUTH
SCALE: 1/4" = 1'-0"




B1 OFFICER OFFICER 104 NORTH
SCALE: 1/4" = 1'-0"




B2 OFFICER OFFICE 104 EAST
SCALE: 1/4" = 1'-0"




B3 OFFICER OFFICE 104 WEST
SCALE: 1/4" = 1'-0"




B4 OFFICER OFFICE 104 SOUTH
SCALE: 1/4" = 1'-0"




A1 OFFICER DORM 118 NORTH
SCALE: 1/4" = 1'-0"



A2 OFFICER DORM 118 EAST
SCALE: 1/4" = 1'-0"



A3 OFFICER DORM 118 SOUTH
SCALE: 1/4" = 1'-0"



A4 OFFICER DORM 118 SOUTH
SCALE: 1/4" = 1'-0"

GENERAL NOTES

1. ALL FINISH MATERIAL COLORS/PATTERNS/STYLES TO BE DETERMINED BY ARCHITECT FROM MANUFACTURER'S FULL RANGE OF COLORS.
2. ALL HOLLOW METAL DOOR FRAMES & DOORS SHALL BE PAINTED (PT-2).
3. RE: SPECIFICATIONS FOR ADDITIONAL FINISH INFORMATION & REQUIREMENTS.
4. ALL EXPOSED STEEL FRAMING (INTERIOR & EXTERIOR) SHALL BE PAINTED (PT-4).
5. PROVIDE FULL HEIGHT CORNER GUARDS AT ALL OUTSIDE GYPSUMCORNERS.
6. ALL CABINETS SHALL BE WOOD LAMINATED (U.N.O.)
7. ALL COUNTERTOPS SHALL BE SOLID SURFACE (U.N.O.)
8. RE: A-161 FOR EXTENT AND HEIGHT OF CEILING FURRDOWNS / TRANSITIONS.
9. COLORS IN DRAWINGS AND LEGENDS ARE FOR REPRESENTATION PURPOSES ONLY AND DO NOT DEPICT ACTUAL FINISHES.
10. ALL WALLS SHALL RECEIVE FIELD PAINT COLOR, "PT-1" (U.N.O., RE: FINISH PLAN)
11. ALL GYP. WALLS SHALL RECEIVE "WB-1".
12. INTERIOR CMU WALLS SHALL BE PAINTED (PT-1) AND SHALL NOT RECEIVE WALL BASE.
13. F.F.& E. SHOWN AS BASIS OF DESIGN. (BY OWNER, U.N.O.)
14. ALL DORM LOCKER STORAGE FURRING SHALL BE PAINTED (PT-2, U.N.O.)
15. ALL FLOOR & WALL MATERIAL TRANSITIONS SHALL RECEIVE METAL SCHLUTER TRIM.
16. ALL RESTROOM AND SHOWER ROOMS WALLS SHALL RECEIVE WALL TILE (WT-1) TO 6' 0" A.F.F.
17. PROVIDE SCHLUTER TRIM FOR RESTROOM & SHOWER CORNER CONDITIONS AND A TOP CAP FOR TRANSITIONS TO GYP BD.
18. 2X6 IN-WALL BLOCKING FOR GEAR LOCKERS BY CONTRACTOR. GC TO COORDINATE MOUNTING HEIGHT WITH OWNER.

FINISH SCHEDULE

INTERIOR FINISHES

FLOOR

LUXURY VINYL TILE 1 (LVT-1)
- MANUFACTURER: TARKETT
- COLLECTION: EVENT + WOOD
- MODEL: CRAFTED PLANK
- SIZE: 6" X 48"
- COLOR: PACIFIC WALNUT

LUXURY VINYL TILE 2 (LVT-2)
- MANUFACTURER: TARKETT
- COLLECTION: EVENT + WOOD
- MODEL: CRAFTED PLANK
- SIZE: 6" X 48"
- COLOR: ANTIQUE WALNUT

FLOOR TILE 1 (FT-1)
- MANUFACTURER: DALTILE
- COLLECTION: NATURAL STONE MARBLE
- MODEL: FIRST SNOW ELEGANCE SQUARE
- SIZE: 12" X 12"
- COLOR: M190

RUBBER FLOORING (RF-1)
- MANUFACTURER: FLEXCO
- COLLECTION: PRIME SPORTS
- MODEL: STARLIGHT PSF-204 RUBBER TILE
- SIZE: 3/8" GAUGE
- COLOR: BLACK W/ RED

SEALED CONCRETE (SC-1)
(RE: SPECS)

MILLWORK

PLASTIC LAMINATE 1 (PL-1)
- MANUFACTURER: WILSONART
- COLOR: 72, 60, 48
- NAME: FREMONT OAK

PLASTIC LAMINATE 2 (PL-2)
- MANUFACTURER: WILSONART
- COLOR: 169, 158, 139
- NAME: HARBOR HICKORY

PLASTIC LAMINATE 3 (PL-3)
- MANUFACTURER: WILSONART
- COLOR: 154, 137, 118
- NAME: FRENCH PEAR

COUNTER TOP 1 (CTOP-1)
- MANUFACTURER: WILSONART
- COLOR: 243, 248, 243
- NAME: DESIGNER WHITE D354SL

GRANITE COUNTER TOP (CTOP-2)
- RE: CONTRACTOR\
- CONTRACTOR FURNISHED, CONTRACTOR INSTALLED

WALL

WALL PAINT 1 (WP-1) | FIELD PAINT
- MANUFACTURER: SHERWIN WILLIAMS
- COLOR: 231 / 216 / 189
- NAME: ROYCROFT VELLUM - SW 2833

WALL PAINT 2 (WP-2)
- MANUFACTURER: SHERWIN WILLIAMS
- COLOR: 193 / 164 / 133
- NAME: FARRO - SW 9103

WALL TILE 1 (WT-1)
- MANUFACTURER: DALTILE
- COLLECTION: FONTE
- MODEL: PIER WHITE
- SIZE: 12" X 24"
- COLOR: M012
- PATTERN: RECTANGLE

WALL TILE 2 (WT-2)
- MANUFACTURER: DALTILE
- TYPE: REMEDY
- MODEL: TONIC
- COLOR: RD26
- SIZE: 1" X 10"
- PATTERN: RECTANGLE

WALL BASE 1 (WB-1)
- MANUFACTURER: ROPPE / 700 SERIES
- COLOR: 52 / 35 / 32
- NAME: 110 BROWN

HM DOOR PAINT 1 (MTL-1)
- MANUFACTURER: SHERWIN WILLIAMS
- COLOR: 79 / 52 / 38
- NAME: FRENCH ROAST - SW 6069

FIBER REINFORCED PLASTIC (FRP-1)
- MANUFACTURER: USFRP
- COLOR: BRIGHT WHITE
- TYPE: CLASS-A (PEBBLED)

STAINLESS STEEL 1 (S STL-1)
REFER TO SPECS

CEILING

2 X 2 DROP CEILING MILDEW RESISTANT (DC-1)
- MANUFACTURER:
- COLLECTION:
- COLOR:

GYPSUM CEILING (GC-1)
- MANUFACTURER:
- COLLECTION:
- COLOR: PT-1

2 X 2 DROP CEILING (DC-2)
- MANUFACTURER:
- COLLECTION:
- COLOR:

MILDEW RESISTANT GYPSUM CEILING (GC-2)
- MANUFACTURER:
- COLLECTION:
- COLOR: PT-1

KEYNOTES

202	DAYROOM LOUNGE CHAIR
203	WALL MOUNTED FLAT SCREEN TV
205	TWIN MATTRESS W/ BED FRAME (BY OWNER)
206	FIRE EXTINGUISHER
241	50" OFFICE T.V. INSTALL POWER & ETHERNET (SAMSUNG)
261	WARDROBE LOCKERS (BY CONTRACTOR)
706	42" DORM CEILING FAN w/ LED KIT - RE: ELEC. SCHEDULE & PLANS

PROFESSIONAL SEAL

RICHARD J. MARTINEZ — 23149 — REGISTERED ARCHITECT — STATE OF TEXAS

LOGO/CONTACT

martinez ARCHITECTS

Martinez Architect, LP
8911 N Capital of Texas Hwy
Suite 4200
Austin, TX 78759
737.900.5166

DESIGN TEAM

Architectural
Martinez Architects

Civil
Hill Country Civil

Landscape
Evergreen Landscape Group

Structural
Matrix Structural

MEP
Emerald MEP

Technology
Imagine IT

Alerting
WestNET

STATION #42
Hays County ESD #4
xxxxx
Wimberley, TX 78676

PROJECT No: **MA 25016**
DATE: **20-OCT-2026**


ISSUE

#		
1	100% DD	06-JAN-2026
2	25% CD	25-FEB-2026
3	75% CD	06-APR-2026
4	98% CD	04-MAY-2026
5	IFP	01-JUN-2026
6	IFB	20-OCT-2026
7	ADDENDUM 3	28-OCT-2026


3

INTERIOR ELEVATIONS


A-221




D1 EMS STORAGE 115 NORTH
SCALE: 1/4" = 1'-0"




D2 EMS STORAGE 115 EAST
SCALE: 1/4" = 1'-0"




D3 EMS STORAGE 115 WEST
SCALE: 1/4" = 1'-0"




D4 EMS STORAGE 115 SOUTH
SCALE: 1/4" = 1'-0"




C1 UTILITY 107 NORTH
SCALE: 1/4" = 1'-0"




C2 UTILITY 107 EAST
SCALE: 1/4" = 1'-0"




C3 UTILITY 107 WEST
SCALE: 1/4" = 1'-0"




C4 UTILITY 107 SOUTH
SCALE: 1/4" = 1'-0"




B1 WATCH OFFICE 121 NORTH
SCALE: 1/4" = 1'-0"




B2 WATCH OFFICE 121 EAST
SCALE: 1/4" = 1'-0"




B3 WATCH OFFICE 121 WEST
SCALE: 1/4" = 1'-0"




B4 WATCH OFFICE 121 SOUTH
SCALE: 1/4" = 1'-0"

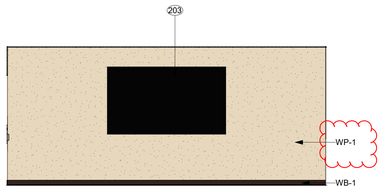


A1 CONFERENCE 105 NORTH
SCALE: 1/4" = 1'-0"



A2 CONFERENCE 105 EAST
SCALE: 1/4" = 1'-0"



A3 CONFERENCE 105 WEST
SCALE: 1/4" = 1'-0"



A4 CONFERENCE 105 SOUTH
SCALE: 1/4" = 1'-0"

GENERAL NOTES

1. ALL FINISH MATERIAL COLORS/PATTERNS/STYLES TO BE DETERMINED BY ARCHITECT FROM MANUFACTURER'S FULL RANGE OF COLORS.
2. ALL HOLLOW METAL DOOR FRAMES & DOORS SHALL BE PAINTED (PT-2).
3. RE: SPECIFICATIONS FOR ADDITIONAL FINISH INFORMATION & REQUIREMENTS.
4. ALL EXPOSED STEEL FRAMING (INTERIOR & EXTERIOR) SHALL BE PAINTED (PT-4).
5. PROVIDE FULL HEIGHT CORNER GUARDS AT ALL OUTSIDE GYPSUMCORNERS.
6. ALL CABINETS SHALL BE WOOD LAMINATED (U.N.O.)
7. ALL COUNTERTOPS SHALL BE SOLID SURFACE (U.N.O.)
8. RE: A-161 FOR EXTENT AND HEIGHT OF CEILING FURRDOWNS / TRANSITIONS.
9. COLORS IN DRAWINGS AND LEGENDS ARE FOR REPRESENTATION PURPOSES ONLY AND DO NOT DEPICT ACTUAL FINISHES.
10. ALL WALLS SHALL RECEIVE FIELD PAINT COLOR, "PT-1" (U.N.O., RE: FINISH PLAN)
11. ALL GYP. WALLS SHALL RECEIVE "WB-1".
12. INTERIOR CMU WALLS SHALL BE PAINTED (PT-1) AND SHALL NOT RECEIVE WALL BASE.
13. F.F.& E. SHOWN AS BASIS OF DESIGN. (BY OWNER, U.N.O.).
14. ALL DORM LOCKER STORAGE FURRING SHALL BE PAINTED (PT-2, U.N.O.)
15. ALL FLOOR & WALL MATERIAL TRANSITIONS SHALL RECEIVE METAL SCHLUTER TRIM.
16. ALL RESTROOM AND SHOWER ROOMS WALLS SHALL RECEIVE WALL TILE (WT-1) TO 6' 0" A.F.F.
17. PROVIDE SCHLUTER TRIM FOR RESTROOM & SHOWER CORNER CONDITIONS AND A TOP CAP FOR TRANSITIONS TO GYP BD.
18. 2X6 IN-WALL BLOCKING FOR GEAR LOCKERS BY CONTRACTOR. GC TO COORDINATE MOUNTING HEIGHT WITH OWNER.

FINISH SCHEDULE

INTERIOR FINISHES

FLOOR

LUXURY VINYL TILE 1 (LVT-1)
- MANUFACTURER: TARKETT
- COLLECTION: EVENT + WOOD
- MODEL: CRAFTED PLANK
- SIZE: 6" X 48"
- COLOR: PACIFIC WALNUT

LUXURY VINYL TILE 2 (LVT-2)
- MANUFACTURER: TARKETT
- COLLECTION: EVENT + WOOD
- MODEL: CRAFTED PLANK
- SIZE: 6" X 48"
- COLOR: ANTIQUE WALNUT

FLOOR TILE 1 (FT-1)
- MANUFACTURER: DALTILE
- COLLECTION: NATURAL STONE MARBLE
- MODEL: FIRST SNOW ELEGANCE SQUARE
- SIZE: 12" X 12"
- COLOR: M190

RUBBER FLOORING (RF-1)
- MANUFACTURER: FLEXCO
- COLLECTION: PRIME SPORTS
- MODEL: STARLIGHT PSF-204
- RUBBER TILE
- SIZE: 3/8" GAUGE
- COLOR: BLACK W/ RED

SEALED CONCRETE (SC-1)
(RE: SPECS)

MILLWORK

PLASTIC LAMINATE 1 (PL-1)
- MANUFACTURER: WILSONART
- COLOR: 72, 60, 48
- NAME: FREMONT OAK

PLASTIC LAMINATE 2 (PL-2)
- MANUFACTURER: WILSONART
- COLOR: 169, 158, 139
- NAME: HARBOR HICKORY

PLASTIC LAMINATE 3 (PL-3)
- MANUFACTURER: WILSONART
- COLOR: 154, 137, 118
- NAME: FRENCH PEAR

COUNTER TOP 1 (CTOP-1)
- MANUFACTURER: WILSONART
- COLOR: 243, 248, 243
- NAME: DESIGNER WHITE D354SL

GRANITE COUNTER TOP (CTOP-2)
- (RE: CONTRACTOR)
- CONTRACTOR FURNISHED, CONTRACTOR INSTALLED

WALL

WALL PAINT 1 (WP-1) / FIELD PAINT
- MANUFACTURER: SHERWIN WILLIAMS
- COLOR: 231 / 216 / 189
- NAME: ROYCROFT VELLUM - SW 2833

WALL PAINT 2 (WP-2)
- MANUFACTURER: SHERWIN WILLIAMS
- COLOR: 193 / 164 / 133
- NAME: FARRO - SW 9103

WALL TILE 1 (WT-1)
- MANUFACTURER: DALTILE
- COLLECTION: FONTE
- MODEL: PIER WHITE
- SIZE: 12" X 24"
- COLOR: M012
- PATTERN: RECTANGLE

WALL TILE 2 (WT-2)
- MANUFACTURER: DALTILE
- TYPE: REMEDY
- MODEL: TONIC
- COLOR: RD26
- SIZE: 1" X 10"
- PATTERN: RECTANGLE

WALL BASE 1 (WB-1)
- MANUFACTURER: ROPPE / 700 SERIES
- COLOR: 52 / 35 / 32
- NAME: 110 BROWN

HM DOOR PAINT 1 (MTL-1)
- MANUFACTURER: SHERWIN WILLIAMS
- COLOR: 79 / 52 / 38
- NAME: FRENCH ROAST - SW 6069

FIBER REINFORCED PLASTIC (FRP-1)
- MANUFACTURER: USFRP
- COLOR: BRIGHT WHITE
- TYPE: CLASS-A (PEBBLED)

STAINLESS STEEL 1 (S STL-1)
REFER TO SPECS

CEILING

2 X 2 DROP CEILING MILDEW RESISTANT (DC-1)
- MANUFACTURER:
- COLLECTION:
- COLOR:

2 X 2 DROP CEILING (DC-2)
- MANUFACTURER:
- COLLECTION:
- COLOR:

GYPSUM CEILING (GC-1)
- MANUFACTURER:
- COLLECTION:
- COLOR: PT-1

MILDEW RESISTANT GYPSUM CEILING (GC-2)
- MANUFACTURER:
- COLLECTION:
- COLOR: PT-1

KEYNOTES

203	WALL MOUNTED FLAT SCREEN TV
219	STACKED WASHER/DRYER UNIT (STAINLESS FINISH)
241	50" OFFICE T.V. INSTALL POWER & ETHERNET (SAMSUNG)

PROFESSIONAL SEAL

REGISTERED ARCHITECT RICHARD J. MARTINEZ 23149 STATE OF TEXAS

LOGO/CONTACT

martinez ARCHITECTS
Martinez Architect, LP
8911 N Capital of Texas Hwy
Suite 4200
Austin, TX 78759
737.900.5166

DESIGN TEAM

Architectural
Martinez Architects

Civil
Hill Country Civil

Landscape
Evergreen Landscape Group

Structural
Matrix Structural

MEP
Emerald MEP

Technology
Imagine IT

Alerting
WestNET

STATION #42

Hays County ESD #4
xxxxx
Wimberley, TX 78676

PROJECT No: MA 25016
DATE: 20-OCT-2026


ISSUE #

1	100% DD	06-JAN-2026
2	25% CD	25-FEB-2026
3	75% CD	06-APR-2026
4	98% CD	04-MAY-2026
5	IFP	01-JUN-2026
6	IFB	20-OCT-2026
7	ADDENDUM 3	28-OCT-2026


3

INTERIOR ELEVATIONS


A-222

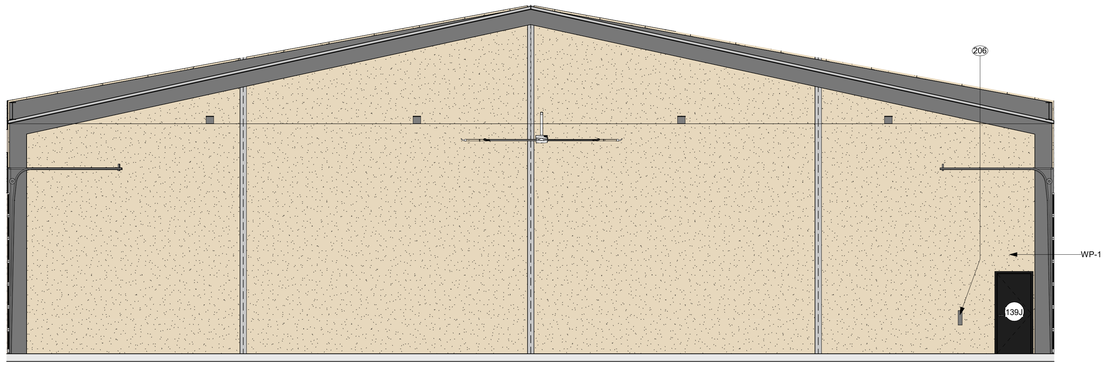


D1 APP BAY 139 NORTH
SCALE: 3/16" = 1'-0"

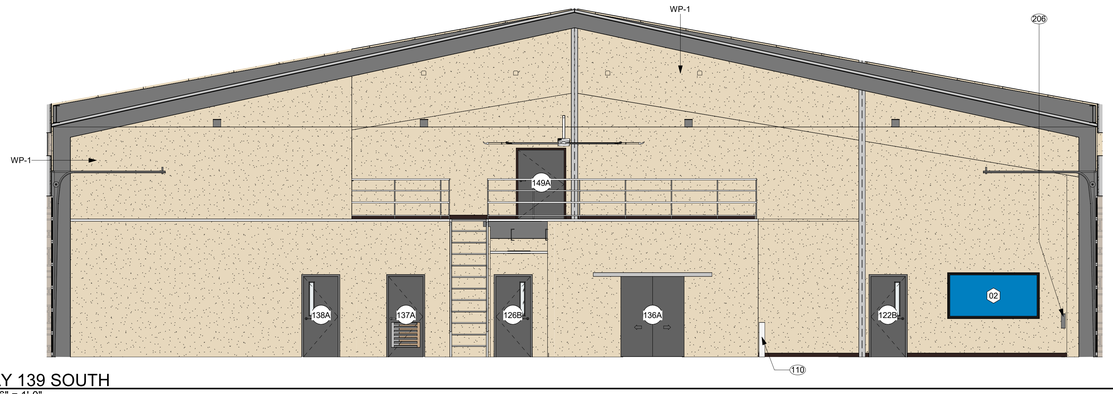

C1 APP BAY 139 SOUTH
SCALE: 3/16" = 1'-0"

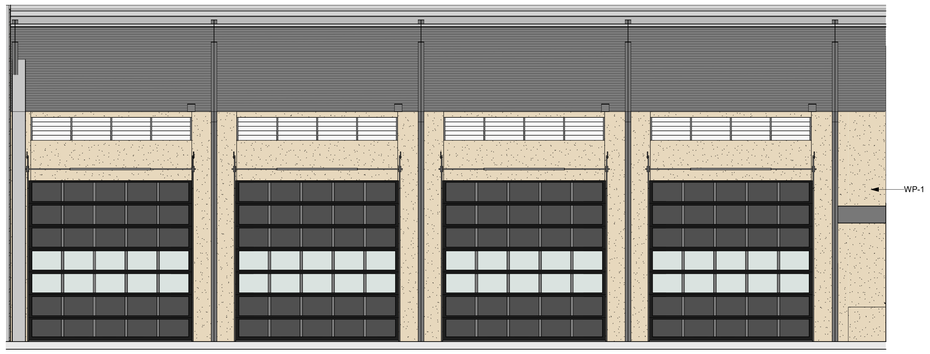

B1 APP BAY 139 EAST
SCALE: 3/16" = 1'-0"

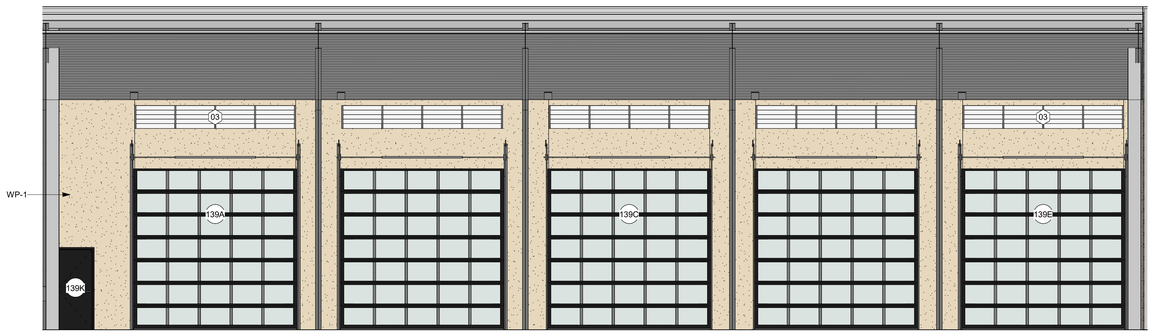

A1 APP BAY 139 WEST
SCALE: 3/16" = 1'-0"

GENERAL NOTES

1. ALL FINISH MATERIAL COLORS/PATTERNS/STYLES TO BE DETERMINED BY ARCHITECT FROM MANUFACTURER'S FULL RANGE OF COLORS.
2. ALL HOLLOW METAL DOOR FRAMES & DOORS SHALL BE PAINTED (PT-2).
3. RE: SPECIFICATIONS FOR ADDITIONAL FINISH INFORMATION & REQUIREMENTS.
4. ALL EXPOSED STEEL FRAMING (INTERIOR & EXTERIOR) SHALL BE PAINTED (PT-4).
5. PROVIDE FULL HEIGHT CORNER GUARDS AT ALL OUTSIDE GYPSUMCORNERS.
6. ALL CABINETS SHALL BE WOOD LAMINATED (U.N.O.)
7. ALL COUNTERTOPS SHALL BE SOLID SURFACE (U.N.O.)
8. RE: A-161 FOR EXTENT AND HEIGHT OF CEILING FURRDOWNS / TRANSITIONS.
9. COLORS IN DRAWINGS AND LEGENDS ARE FOR REPRESENTATION PURPOSES ONLY AND DO NOT DEPICT ACTUAL FINISHES.
10. ALL WALLS SHALL RECEIVE FIELD PAINT COLOR, "PT-1" (U.N.O., RE: FINISH PLAN)
11. ALL GYP. WALLS SHALL RECEIVE "WB-1".
12. INTERIOR CMU WALLS SHALL BE PAINTED (PT-1) AND SHALL NOT RECEIVE WALL BASE.
13. F.F.& E. SHOWN AS BASIS OF DESIGN. (BY OWNER, U.N.O.)
14. ALL DORM LOCKER STORAGE FURRING SHALL BE PAINTED (PT-2, U.N.O.)
15. ALL FLOOR & WALL MATERIAL TRANSITIONS SHALL RECEIVE METAL SCHLUTER TRIM.
16. ALL RESTROOM AND SHOWER ROOMS WALLS SHALL RECEIVE WALL TILE (WT-1) TO 6' 0" A.F.F.
17. PROVIDE SCHLUTER TRIM FOR RESTROOM & SHOWER CORNER CONDITIONS AND A TOP CAP FOR TRANSITIONS TO GYP BD.
18. 2X6 IN-WALL BLOCKING FOR GEAR LOCKERS BY CONTRACTOR. GC TO COORDINATE MOUNTING HEIGHT WITH OWNER.

FINISH SCHEDULE

INTERIOR FINISHES

FLOOR

LUXURY VINYL TILE 1 (LVT-1)
- MANUFACTURER: TARKETT
- COLLECTION: EVENT + WOOD
- MODEL: CRAFTED PLANK
- SIZE: 6" X 48"
- COLOR: PACIFIC WALNUT

LUXURY VINYL TILE 2 (LVT-2)
- MANUFACTURER: TARKETT
- COLLECTION: EVENT + WOOD
- MODEL: CRAFTED PLANK
- SIZE: 6" X 48"
- COLOR: ANTIQUE WALNUT

FLOOR TILE 1 (FT-1)
- MANUFACTURER: DALTILE
- COLLECTION: NATURAL STONE MARBLE
- MODEL: FIRST SNOW ELEGANCE SQUARE
- SIZE: 12" X 12"
- COLOR: M190

RUBBER FLOORING (RF-1)
- MANUFACTURER: FLEXCO
- COLLECTION: PRIME SPORTS
- MODEL: STARLIGHT PSF-204 RUBBER TILE
- SIZE: 3/8" GAUGE
- COLOR: BLACK W/ RED

SEALED CONCRETE (SC-1)
(RE: SPECS)

MILLWORK

PLASTIC LAMINATE 1 (PL-1)
- MANUFACTURER: WILSONART
- COLOR: 72, 60, 48
- NAME: FREMONT OAK

PLASTIC LAMINATE 2 (PL-2)
- MANUFACTURER: WILSONART
- COLOR: 169, 158, 139
- NAME: HARBOR HICKORY

PLASTIC LAMINATE 3 (PL-3)
- MANUFACTURER: WILSONART
- COLOR: 154, 137, 119
- NAME: FRENCH PEAR

COUNTER TOP 1 (CTOP-1)
- MANUFACTURER: WILSONART
- COLOR: 243, 248, 243
- NAME: DESIGNER WHITE D354SL

GRANITE COUNTER TOP (CTOP-2)
- (RE: CONTRACTOR)
- CONTRACTOR FURNISHED, CONTRACTOR INSTALLED

WALL

WALL PAINT 1 (WP-1) | FIELD PAINT
- MANUFACTURER: SHERWIN WILLIAMS
- COLOR: 231 / 216 / 189
- NAME: ROYCROFT VELLUM - SW 2833

WALL PAINT 2 (WP-2)
- MANUFACTURER: SHERWIN WILLIAMS
- COLOR: 193 / 164 / 133
- NAME: FARRO - SW 9103

WALL TILE 1 (WT-1)
- MANUFACTURER: DALTILE
- COLLECTION: FONTE
- MODEL: PIER WHITE
- SIZE: 12" X 24"
- COLOR: M012
- PATTERN: RECTANGLE

WALL TILE 2 (WT-2)
- MANUFACTURER: DALTILE
- TYPE: REMEDY
- MODEL: TONIC
- COLOR: RD26
- SIZE: 1" X 10"
- PATTERN: RECTANGLE

WALL BASE 1 (WB-1)
- MANUFACTURER: ROPPE / 700 SERIES
- COLOR: 52 / 35 / 32
- NAME: 110 BROWN

HM DOOR PAINT 1 (MTL-1)
- MANUFACTURER: SHERWIN WILLIAMS
- COLOR: 79 / 52 / 38
- NAME: FRENCH ROAST - SW 6069

FIBER REINFORCED PLASTIC (FRP-1)
- MANUFACTURER: USFRP
- COLOR: BRIGHT WHITE
- TYPE: CLASS-A (PEBBLED)

STAINLESS STEEL 1 (S STL-1)
REFER TO SPECS

CEILING

2 X 2 DROP CEILING MILDEW RESISTANT (DC-1)
- MANUFACTURER:
- COLLECTION:
- COLOR:

2 X 2 DROP CEILING (DC-2)
- MANUFACTURER:
- COLLECTION:
- COLOR:

GYPSUM CEILING (GC-1)
- MANUFACTURER:
- COLLECTION:
- COLOR: PT-1

MILDEW RESISTANT GYPSUM CEILING (GC-2)
- MANUFACTURER:
- COLLECTION:
- COLOR: PT-1

KEYNOTES

110	CONCRETE-FILLED STEEL PIPE BOLLARDS (D.O.T. YELLOW PAINTED BOLLARDS & PROPANE TANK; GC TO PROVIDE SAMPLES)
206	FIRE EXTINGUISHER

PROFESSIONAL SEAL

REGISTERED ARCHITECT · RUSSELL J. MARTINEZ · 23149 · STATE OF TEXAS

LOGO/CONTACT

martinez ARCHITECTS
Martinez Architect, LP
8911 N Capital of Texas Hwy
Suite 4200
Austin, TX 78759
737.900.5166

DESIGN TEAM

Architectural
Martinez Architects

Civil
Hill Country Civil

Landscape
Evergreen Landscape Group

Structural
Matrix Structural

MEP
Emerald MEP

Technology
Imagine IT

Alerting
WestNET

STATION #42
Hays County ESD #4
xxxxx
Wimberley, TX 78676


PROJECT No: **MA 25016**
DATE: **20-OCT-2026**

ISSUE


#		
1	100% DD	06-JAN-2026
2	25% CD	25-FEB-2026
3	75% CD	06-APR-2026
4	98% CD	04-MAY-2026
5	IFP	01-JUN-2026
6	IFB	20-OCT-2026
7	ADDENDUM 3	28-OCT-2026

INTERIOR ELEVATIONS


A-223




D1 MECH 145 EAST
SCALE: 1/4" = 1'-0"

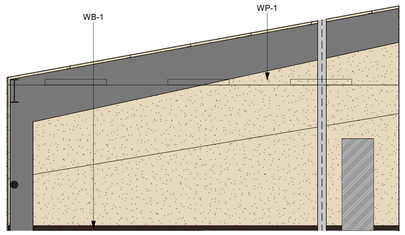


D2 MECH 145 SOUTH
SCALE: 1/4" = 1'-0"

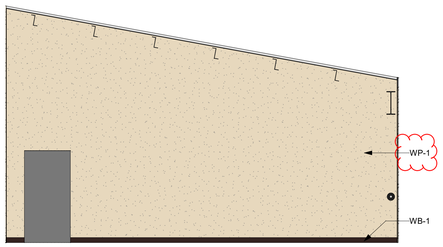


D3 MECH 145 NORTH
SCALE: 1/4" = 1'-0"




C1 PPE 136 EAST
SCALE: 1/4" = 1'-0"




C2 PPE 136 SOUTH
SCALE: 1/4" = 1'-0"




C3 PPE 136 NORTH
SCALE: 1/4" = 1'-0"




C4 PPE 136 WEST
SCALE: 1/4" = 1'-0"




B1 SCBA 137 EAST
SCALE: 1/4" = 1'-0"




B2 SCBA 137 SOUTH
SCALE: 1/4" = 1'-0"




B3 SCBA 137 NORTH
SCALE: 1/4" = 1'-0"

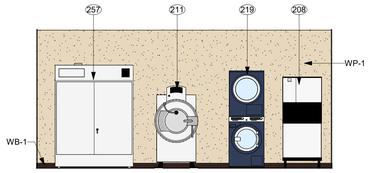


B4 SCBA 137 WEST
SCALE: 1/4" = 1'-0"




A1 FITNESS 138 EAST
SCALE: 1/4" = 1'-0"

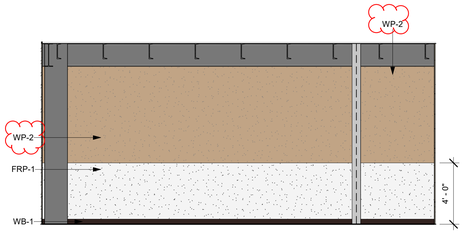

A2 FITNESS 138 SOUTH
SCALE: 1/4" = 1'-0"

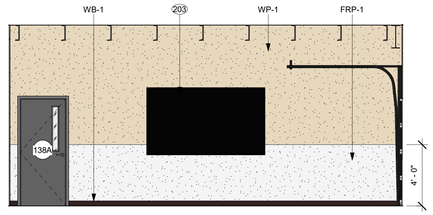

A3 FITNESS 138 NORTH
SCALE: 1/4" = 1'-0"

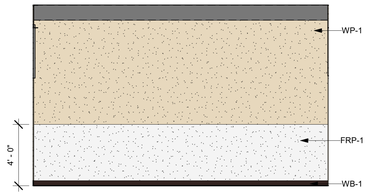

A4 FITNESS 138 WEST
SCALE: 1/4" = 1'-0"

GENERAL NOTES

1. ALL FINISH MATERIAL COLORS/PATTERNS/STYLES TO BE DETERMINED BY ARCHITECT FROM MANUFACTURER'S FULL RANGE OF COLORS.
2. ALL HOLLOW METAL DOOR FRAMES & DOORS SHALL BE PAINTED (PT-2).
3. RE: SPECIFICATIONS FOR ADDITIONAL FINISH INFORMATION & REQUIREMENTS.
4. ALL EXPOSED STEEL FRAMING (INTERIOR & EXTERIOR) SHALL BE PAINTED (PT-4).
5. PROVIDE FULL HEIGHT CORNER GUARDS AT ALL OUTSIDE GYPSUMCORNERS.
6. ALL CABINETS SHALL BE WOOD LAMINATED (U.N.O.)
7. ALL COUNTERTOPS SHALL BE SOLID SURFACE (U.N.O.)
8. RE: A-161 FOR EXTENT AND HEIGHT OF CEILING FURRDOWNS / TRANSITIONS.
9. COLORS IN DRAWINGS AND LEGENDS ARE FOR REPRESENTATION PURPOSES ONLY AND DO NOT DEPICT ACTUAL FINISHES.
10. ALL WALLS SHALL RECEIVE FIELD PAINT COLOR, "PT-1" (U.N.O., RE: FINISH PLAN)
11. ALL GYP. WALLS SHALL RECEIVE "WB-1".
12. INTERIOR CMU WALLS SHALL BE PAINTED (PT-1) AND SHALL NOT RECEIVE WALL BASE.
13. F.F.& E. SHOWN AS BASIS OF DESIGN. (BY OWNER, U.N.O.)
14. ALL DORM LOCKER STORAGE FURRING SHALL BE PAINTED (PT-2, U.N.O.)
15. ALL FLOOR & WALL MATERIAL TRANSITIONS SHALL RECEIVE METAL SCHLUTER TRIM.
16. ALL RESTROOM AND SHOWER ROOMS WALLS SHALL RECEIVE WALL TILE (WT-1) TO 6' 0" A.F.F.
17. PROVIDE SCHLUTER TRIM FOR RESTROOM & SHOWER CORNER CONDITIONS AND A TOP CAP FOR TRANSITIONS TO GYP BD.
18. 2X6 IN-WALL BLOCKING FOR GEAR LOCKERS BY CONTRACTOR. GC TO COORDINATE MOUNTING HEIGHT WITH OWNER.

FINISH SCHEDULE

INTERIOR FINISHES

FLOOR

LUXURY VINYL TILE 1 (LVT-1)
- MANUFACTURER: TARKETT
- COLLECTION: EVENT + WOOD
- MODEL: CRAFTED PLANK
- SIZE: 6" X 48"
- COLOR: PACIFIC WALNUT

LUXURY VINYL TILE 2 (LVT-2)
- MANUFACTURER: TARKETT
- COLLECTION: EVENT + WOOD
- MODEL: CRAFTED PLANK
- SIZE: 6" X 48"
- COLOR: ANTIQUE WALNUT

FLOOR TILE 1 (FT-1)
- MANUFACTURER: DALTILE
- COLLECTION: NATURAL STONE MARBLE
- MODEL: FIRST SNOW ELEGANCE SQUARE
- SIZE: 12" X 12"
- COLOR: M190

RUBBER FLOORING (RF-1)
- MANUFACTURER: FLEXCO
- COLLECTION: PRIME SPORTS
- MODEL: STARLIGHT PSF-204 RUBBER TILE
- SIZE: 3/8" GAUGE
- COLOR: BLACK W/ RED

SEALED CONCRETE (SC-1)
(RE: SPECS)

MILLWORK

PLASTIC LAMINATE 1 (PL-1)
- MANUFACTURER: WILSONART
- COLOR: 72, 60, 48
- NAME: FREMONT OAK

PLASTIC LAMINATE 2 (PL-2)
- MANUFACTURER: WILSONART
- COLOR: 169, 158, 139
- NAME: HARBOR HICKORY

PLASTIC LAMINATE 3 (PL-3)
- MANUFACTURER: WILSONART
- COLOR: 154, 137, 119
- NAME: FRENCH PEAR

COUNTER TOP 1 (CTOP-1)
- MANUFACTURER: WILSONART
- COLOR: 243, 248, 243
- NAME: DESIGNER WHITE D354SL

GRANITE COUNTER TOP (CTOP-2)
- (RE: CONTRACTOR)
- CONTRACTOR FURNISHED, CONTRACTOR INSTALLED

WALL

WALL PAINT 1 (WP-1) | FIELD PAINT
- MANUFACTURER: SHERWIN WILLIAMS
- COLOR: 231 / 216 / 189
- NAME: ROYCROFT VELLUM - SW 2833

WALL PAINT 2 (WP-2)
- MANUFACTURER: SHERWIN WILLIAMS
- COLOR: 193 / 164 / 133
- NAME: FARRO - SW 9103

WALL TILE 1 (WT-1)
- MANUFACTURER: DALTILE
- COLLECTION: FONTE
- MODEL: PIER WHITE
- SIZE: 12" X 24"
- COLOR: M012
- PATTERN: RECTANGLE

WALL TILE 2 (WT-2)
- MANUFACTURER: DALTILE
- TYPE: REMEDY
- MODEL: TONIC
- COLOR: RD26
- SIZE: 1" X 10"
- PATTERN: RECTANGLE

WALL BASE 1 (WB-1)
- MANUFACTURER: ROPPE / 700 SERIES
- COLOR: 52 / 35 / 32
- NAME: 110 BROWN

HM DOOR PAINT 1 (MTL-1)
- MANUFACTURER: SHERWIN WILLIAMS
- COLOR: 79 / 52 / 38
- NAME: FRENCH ROAST - SW 6069

FIBER REINFORCED PLASTIC (FRP-1)
- MANUFACTURER: USFRP
- COLOR: BRIGHT WHITE
- TYPE: CLASS-A (PEBBLED)

STAINLESS STEEL 1 (S STL-1)
REFER TO SPECS

CEILING

2 X 2 DROP CEILING MILDEW RESISTANT (DC-1)
- MANUFACTURER:
- COLLECTION:
- COLOR:

2 X 2 DROP CEILING (DC-2)
- MANUFACTURER:
- COLLECTION:
- COLOR:

GYPSUM CEILING (GC-1)
- MANUFACTURER:
- COLLECTION:
- COLOR: PT-1

MILDEW RESISTANT GYPSUM CEILING (GC-2)
- MANUFACTURER:
- COLLECTION:
- COLOR: PT-1

KEYNOTES

203	WALL MOUNTED FLAT SCREEN TV
207	WALL MOUNTED GEAR LOCKERS - RE: OFOI. 2X6 IN-WALL BLOCKING BY CONTRACTOR. GC TO COORDINATE
208	ICE MACHINE
211	WASHER EXTRACTOR
219	STACKED WASHER/DRYER UNIT (STAINLESS FINISH)
255	WATER HEATER
256	AIR COMPRESSOR
257	GEAR DRYER

PROFESSIONAL SEAL

REGISTERED ARCHITECT
RICHARD J. MARTINEZ
23149
STATE OF TEXAS

LOGO/CONTACT

martinez ARCHITECTS
Martinez Architect, LP
8911 N Capital of Texas Hwy
Suite 4200
Austin, TX 78759
737.900.5166

DESIGN TEAM

Architectural
Martinez Architects

Civil
Hill Country Civil

Landscape
Evergreen Landscape Group

Structural
Matrix Structural

MEP
Emerald MEP

Technology
Imagine IT

Alerting
WestNET

STATION #42

Hays County ESD #4
xxxxx
Wimberley, TX 78676

PROJECT No: MA 25016
DATE: 20-OCT-2026


ISSUE #

1	100% DD	06-JAN-2026
2	25% CD	25-FEB-2026
3	75% CD	06-APR-2026
4	98% CD	04-MAY-2026
5	IFP	01-JUN-2026
6	IFB	20-OCT-2026
7	ADDENDUM 3	28-OCT-2026


3

INTERIOR ELEVATIONS


A-224




E1 ADA RR 116 ENLARGED PLAN
SCALE: 1/4" = 1'-0"




E2 ADA RR 101 ENLARGED PLAN
SCALE: 1/4" = 1'-0"




E3 RR 134 ENLARGED PLAN
SCALE: 1/4" = 1'-0"




E4 EXAM 102 ENLARGED PLAN
SCALE: 1/4" = 1'-0"




D1 ADA RR 116 WEST
SCALE: 1/4" = 1'-0"




D2 ADA RR 101 WEST
SCALE: 1/4" = 1'-0"




D3 RR 134 WEST
SCALE: 1/4" = 1'-0"




D4 EXAM 102 WEST
SCALE: 1/4" = 1'-0"




C1 ADA RR 116 SOUTH
SCALE: 1/4" = 1'-0"




C2 ADA RR 101 SOUTH
SCALE: 1/4" = 1'-0"




C3 RR 134 SOUTH
SCALE: 1/4" = 1'-0"




C4 EXAM 102 SOUTH
SCALE: 1/4" = 1'-0"




B1 ADA RR 116 EAST
SCALE: 1/4" = 1'-0"




B2 ADA RR 101 NORTH
SCALE: 1/4" = 1'-0"




B3 RR 134 NORTH
SCALE: 1/4" = 1'-0"




B4 EXAM 102 NORTH
SCALE: 1/4" = 1'-0"




A1 ADA RR 116 NORTH
SCALE: 1/4" = 1'-0"



A2 ADA RR 101 EAST
SCALE: 1/4" = 1'-0"



A3 RR 134 EAST
SCALE: 1/4" = 1'-0"



A4 EXAM 102 EAST
SCALE: 1/4" = 1'-0"

GENERAL NOTES

1. ALL FINISH MATERIAL COLORS/PATTERNS/STYLES TO BE DETERMINED BY ARCHITECT FROM MANUFACTURER'S FULL RANGE OF COLORS.
2. ALL HOLLOW METAL DOOR FRAMES & DOORS SHALL BE PAINTED (PT-2).
3. RE: SPECIFICATIONS FOR ADDITIONAL FINISH INFORMATION & REQUIREMENTS.
4. ALL EXPOSED STEEL FRAMING (INTERIOR & EXTERIOR) SHALL BE PAINTED (PT-4).
5. PROVIDE FULL HEIGHT CORNER GUARDS AT ALL OUTSIDE GYPSUMCORNERS.
6. ALL CABINETS SHALL BE WOOD LAMINATED (U.N.O.)
7. ALL COUNTERTOPS SHALL BE SOLID SURFACE (U.N.O.)
8. RE: A-161 FOR EXTENT AND HEIGHT OF CEILING FURRDOWNS / TRANSITIONS.
9. COLORS IN DRAWINGS AND LEGENDS ARE FOR REPRESENTATION PURPOSES ONLY AND DO NOT DEPICT ACTUAL FINISHES.
10. ALL WALLS SHALL RECEIVE FIELD PAINT COLOR, "PT-1" (U.N.O., RE: FINISH PLAN)
11. ALL GYP. WALLS SHALL RECEIVE "WB-1".
12. INTERIOR CMU WALLS SHALL BE PAINTED (PT-1) AND SHALL NOT RECEIVE WALL BASE.
13. F.F.& E. SHOWN AS BASIS OF DESIGN. (BY OWNER; U.N.O.)
14. ALL DORM LOCKER STORAGE FURRING SHALL BE PAINTED (PT-2, U.N.O.)
15. ALL FLOOR & WALL MATERIAL TRANSITIONS SHALL RECEIVE METAL SCHLUTER TRIM.
16. ALL RESTROOM AND SHOWER ROOMS WALLS SHALL RECEIVE WALL TILE (WT-1) TO 6' 0" A.F.F.
17. PROVIDE SCHLUTER TRIM FOR RESTROOM & SHOWER CORNER CONDITIONS AND A TOP CAP FOR TRANSITIONS TO GYP BD.
18. 2X6 IN-WALL BLOCKING FOR GEAR LOCKERS BY CONTRACTOR. GC TO COORDINATE MOUNTING HEIGHT WITH OWNER.

FINISH SCHEDULE

INTERIOR FINISHES

FLOOR

LUXURY VINYL TILE 1 (LVT-1)
- MANUFACTURER: TARKETT
- COLLECTION: EVENT + WOOD
- MODEL: CRAFTED PLANK
- SIZE: 6" X 48"
- COLOR: PACIFIC WALNUT

LUXURY VINYL TILE 2 (LVT-2)
- MANUFACTURER: TARKETT
- COLLECTION: EVENT + WOOD
- MODEL: CRAFTED PLANK
- SIZE: 6" X 48"
- COLOR: ANTIQUE WALNUT

FLOOR TILE 1 (FT-1)
- MANUFACTURER: DALTILE
- COLLECTION: NATURAL STONE MARBLE
- MODEL: FIRST SNOW ELEGANCE SQUARE
- SIZE: 12" X 12"
- COLOR: M190

RUBBER FLOORING (RF-1)
- MANUFACTURER: FLEXCO
- COLLECTION: PRIME SPORTS
- MODEL: STARLIGHT PSF-204 RUBBER TILE
- SIZE: 3/8" GAUGE
- COLOR: BLACK W/ RED

SEALED CONCRETE (SC-1)
(RE: SPECS)

MILLWORK

PLASTIC LAMINATE 1 (PL-1)
- MANUFACTURER: WILSONART
- COLOR: 72, 60, 48
- NAME: FREMONT OAK

PLASTIC LAMINATE 2 (PL-2)
- MANUFACTURER: WILSONART
- COLOR: 169, 158, 139
- NAME: HARBOR HICKORY

PLASTIC LAMINATE 3 (PL-3)
- MANUFACTURER: WILSONART
- COLOR: 154, 137, 118
- NAME: FRENCH PEAR

COUNTER TOP 1 (CTOP-1)
- MANUFACTURER: WILSONART
- COLOR: 243, 248, 243
- NAME: DESIGNER WHITE D354SL

GRANITE COUNTER TOP (CTOP-2)
- (RE: CONTRACTOR)
- CONTRACTOR FURNISHED, CONTRACTOR INSTALLED

CEILING

2 X 2 DROP CEILING MILDEW RESISTANT (DC-1)
- MANUFACTURER:
- COLLECTION:
- COLOR:

2 X 2 DROP CEILING (DC-2)
- MANUFACTURER:
- COLLECTION:
- COLOR:

GYPSUM CEILING (GC-1)
- MANUFACTURER:
- COLLECTION:
- COLOR: PT-1

MILDEW RESISTANT GYPSUM CEILING (GC-2)
- MANUFACTURER:
- COLLECTION:
- COLOR: PT-1

WALL

WALL PAINT 1 (WP-1) | FIELD PAINT
- MANUFACTURER: SHERWIN WILLIAMS
- COLOR: 231 / 216 / 189
- NAME: ROYCROFT VELLUM - SW 2833

WALL PAINT 2 (WP-2)
- MANUFACTURER: SHERWIN WILLIAMS
- COLOR: 193 / 164 / 133
- NAME: FARRO - SW 9103

WALL TILE 1 (WT-1)
- MANUFACTURER: DALTILE
- COLLECTION: FONTE
- MODEL: PIER WHITE
- SIZE: 12" X 24"
- COLOR: M012
- PATTERN: RECTANGLE

WALL TILE 2 (WT-2)
- MANUFACTURER: DALTILE
- TYPE: REMEDY
- MODEL: TONIC
- COLOR: RD26
- SIZE: 1" X 10"
- PATTERN: RECTANGLE

WALL BASE 1 (WB-1)
- MANUFACTURER: ROPPE / 700 SERIES
- COLOR: 52 / 35 / 32
- NAME: 110 BROWN

HM DOOR PAINT 1 (MTL-1)
- MANUFACTURER: SHERWIN WILLIAMS
- COLOR: 79 / 52 / 38
- NAME: FRENCH ROAST - SW 6069

FIBER REINFORCED PLASTIC (FRP-1)
- MANUFACTURER: USFRP
- COLOR: BRIGHT WHITE
- TYPE: CLASS-A (PEBBLED)

STAINLESS STEEL 1 (S STL-1)
REFER TO SPECS

KEYNOTES

213 MIRROR AND FRAME
214 ADA GRAB BAR
216 STAINLESS STEEL SHOWER ROD (ULINE 36" #H12007 & 60" #H12008; CURTAINS & HOOKS BY CLIENT)
245 SHOWER ROBE HOOK (DELTA "KAYRA"; MATCH FINISH TO SHOWER HEAD)
246 ADA SHOWER CORNER GRAB BAR
247 WALL-MOUNTED ADA COMPLIANT FOLDING SHOWER SEAT
253 TOILET PAPER DISPENSER (BY OWNER)
258 HAND TOWEL DISPENSER (BY OWNER)
259 TALL CABINET
606 MIRROR - 36"W x 36"H

PROFESSIONAL SEAL

REGISTERED ARCHITECT RICHARD J. MARTINEZ 23149 STATE OF TEXAS

LOGO/CONTACT

martinez ARCHITECTS
Martinez Architect, LP
8911 N Capital of Texas Hwy
Suite 4200
Austin, TX 78759
737.900.5166

DESIGN TEAM

Architectural
Martinez Architects

Civil
Hill Country Civil

Landscape
Evergreen Landscape Group

Structural
Matrix Structural

MEP
Emerald MEP

Technology
Imagine IT

Alerting
WestNET

STATION #42
Hays County ESD #4
xxxxx
Wimberley, TX 78676

PROJECT No: **MA 25016**
DATE: **20-OCT-2026**


ISSUE

#		
6	IFB	20-OCT-2026
7	ADDENDUM 3	28-OCT-2026


3

LARGE SCALE TOILET PLANS


A-401

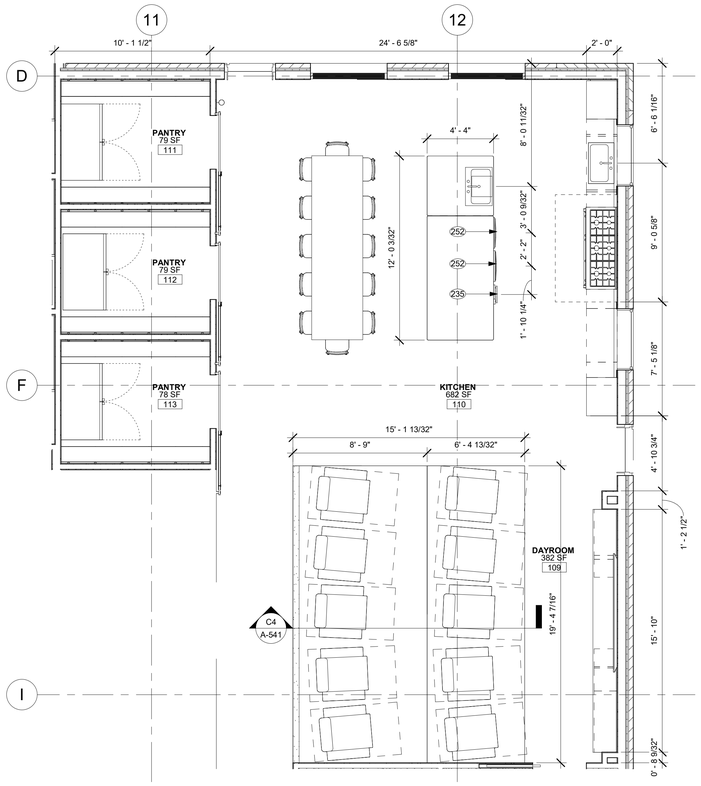


C1 KITCHEN 110 & DAYROOM 109 ENLARGED PLAN
SCALE: 1/4" = 1'-0"




D3 KITCHEN ISLAND
SCALE: 1/4" = 1'-0"




C3 PANTRY 113 WEST
SCALE: 1/4" = 1'-0"




C4 PANTRY 113 SOUTH
SCALE: 1/4" = 1'-0"

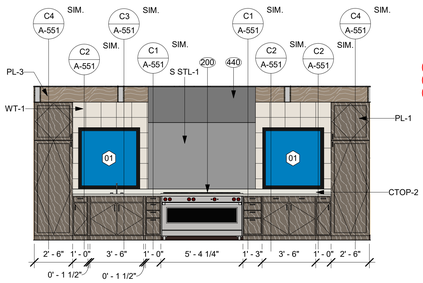


B1 KITCHEN 110 EAST
SCALE: 1/4" = 1'-0"

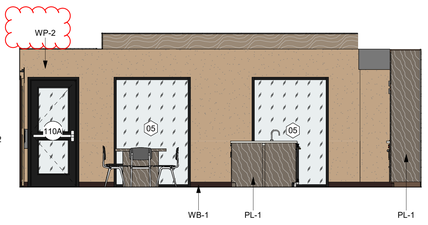


B2 KITCHEN 110 NORTH
SCALE: 1/4" = 1'-0"

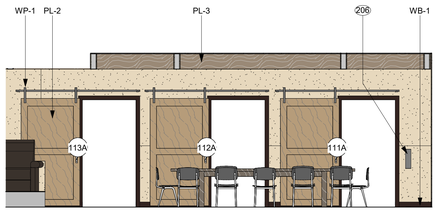


B3 KITCHEN 110 WEST
SCALE: 1/4" = 1'-0"




B4 PANTRY 113 EAST
SCALE: 1/4" = 1'-0"

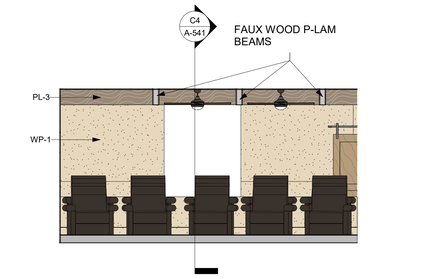


A1 DAYROOM 109 EAST
SCALE: 1/4" = 1'-0"

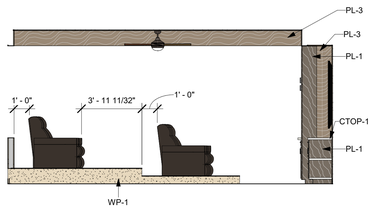

A2 DAYROOM 109 NORTH
SCALE: 1/4" = 1'-0"

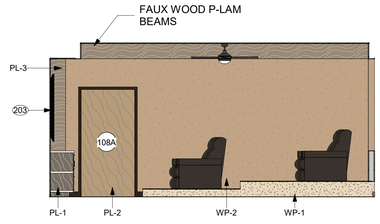

A3 DAYROOM 109 SOUTH
SCALE: 1/4" = 1'-0"



A4 DAYROOM 109 WEST
SCALE: 1/4" = 1'-0"

GENERAL NOTES

1. ALL FINISH MATERIAL COLORS/PATTERNS/STYLES TO BE DETERMINED BY ARCHITECT FROM MANUFACTURER'S FULL RANGE OF COLORS.
2. ALL HOLLOW METAL DOOR FRAMES & DOORS SHALL BE PAINTED (PT-2).
3. RE: SPECIFICATIONS FOR ADDITIONAL FINISH INFORMATION & REQUIREMENTS.
4. ALL EXPOSED STEEL FRAMING (INTERIOR & EXTERIOR) SHALL BE PAINTED (PT-4).
5. PROVIDE FULL HEIGHT CORNER GUARDS AT ALL OUTSIDE GYPSUMCORNERS.
6. ALL CABINETS SHALL BE WOOD LAMINATED (U.N.O.)
7. ALL COUNTERTOPS SHALL BE SOLID SURFACE (U.N.O.)
8. RE: A-161 FOR EXTENT AND HEIGHT OF CEILING FURRDOWNS / TRANSITIONS.
9. COLORS IN DRAWINGS AND LEGENDS ARE FOR REPRESENTATION PURPOSES ONLY AND DO NOT DEPICT ACTUAL FINISHES.
10. ALL WALLS SHALL RECEIVE FIELD PAINT COLOR, "PT-1" (U.N.O., RE: FINISH PLAN)
11. ALL GYP. WALLS SHALL RECEIVE "WB-1".
12. INTERIOR CMU WALLS SHALL BE PAINTED (PT-1) AND SHALL NOT RECEIVE WALL BASE.
13. F.F.& E. SHOWN AS BASIS OF DESIGN. (BY OWNER, U.N.O.)
14. ALL DORM LOCKER STORAGE FURRING SHALL BE PAINTED (PT-2, U.N.O.)
15. ALL FLOOR & WALL MATERIAL TRANSITIONS SHALL RECEIVE METAL SCHLUTER TRIM.
16. ALL RESTROOM AND SHOWER ROOMS WALLS SHALL RECEIVE WALL TILE (WT-1) TO 6' 0" A.F.F.
17. PROVIDE SCHLUTER TRIM FOR RESTROOM & SHOWER CORNER CONDITIONS AND A TOP CAP FOR TRANSITIONS TO GYP BD.
18. 2X6 IN-WALL BLOCKING FOR GEAR LOCKERS BY CONTRACTOR. GC TO COORDINATE MOUNTING HEIGHT WITH OWNER.

FINISH SCHEDULE

INTERIOR FINISHES

FLOOR

LUXURY VINYL TILE 1 (LVT-1)
- MANUFACTURER: TARKETT
- COLLECTION: EVENT + WOOD
- MODEL: CRAFTED PLANK
- SIZE: 6" X 48"
- COLOR: PACIFIC WALNUT

LUXURY VINYL TILE 2 (LVT-2)
- MANUFACTURER: TARKETT
- COLLECTION: EVENT + WOOD
- MODEL: CRAFTED PLANK
- SIZE: 6" X 48"
- COLOR: ANTIQUE WALNUT

FLOOR TILE 1 (FT-1)
- MANUFACTURER: DALTILE
- COLLECTION: NATURAL STONE MARBLE
- MODEL: FIRST SNOW ELEGANCE SQUARE
- SIZE: 12" X 12"
- COLOR: M190

RUBBER FLOORING (RF-1)
- MANUFACTURER: FLEXCO
- COLLECTION: PRIME SPORTS
- MODEL: STARLIGHT PSF-204 RUBBER TILE
- SIZE: 3/8" GAUGE
- COLOR: BLACK W/ RED

SEALED CONCRETE (SC-1)
(RE: SPECS)

MILLWORK

PLASTIC LAMINATE 1 (PL-1)
- MANUFACTURER: WILSONART
- COLOR: 72, 60, 48
- NAME: FREMONT OAK

PLASTIC LAMINATE 2 (PL-2)
- MANUFACTURER: WILSONART
- COLOR: 169, 158, 139
- NAME: HARBOR HICKORY

PLASTIC LAMINATE 3 (PL-3)
- MANUFACTURER: WILSONART
- COLOR: 154, 137, 118
- NAME: FRENCH PEAR

COUNTER TOP 1 (CTOP-1)
- MANUFACTURER: WILSONART
- COLOR: 243, 248, 243
- NAME: DESIGNER WHITE D354SL

GRANITE COUNTER TOP (CTOP-2)
- (RE: CONTRACTOR)
- CONTRACTOR FURNISHED, CONTRACTOR INSTALLED

CEILING

2 X 2 DROP CEILING MILDEW RESISTANT (DC-1)
- MANUFACTURER:
- COLLECTION:
- COLOR:

2 X 2 DROP CEILING (DC-2)
- MANUFACTURER:
- COLLECTION:
- COLOR:

WALL

WALL PAINT 1 (WP-1) | FIELD PAINT
- MANUFACTURER: SHERWIN WILLIAMS
- COLOR: 231 / 216 / 189
- NAME: ROYCROFT VELLUM - SW 2833

WALL PAINT 2 (WP-2)
- MANUFACTURER: SHERWIN WILLIAMS
- COLOR: 193 / 164 / 133
- NAME: FARRO - SW 9103

WALL TILE 1 (WT-1)
- MANUFACTURER: DALTILE
- COLLECTION: FONTE
- MODEL: PIER WHITE
- SIZE: 12" X 24"
- COLOR: M012
- PATTERN: RECTANGLE

WALL TILE 2 (WT-2)
- MANUFACTURER: DALTILE
- TYPE: REMEDY
- MODEL: TONIC
- COLOR: RD26
- SIZE: 1"X 10"
- PATTERN: RECTANGLE

WALL BASE 1 (WB-1)
- MANUFACTURER: ROPPE / 700 SERIES
- COLOR: 52 / 35 / 32
- NAME: 110 BROWN

HM DOOR PAINT 1 (MTL-1)
- MANUFACTURER: SHERWIN WILLIAMS
- COLOR: 79 / 52 / 38
- NAME: FRENCH ROAST - SW 6069

FIBER REINFORCED PLASTIC (FRP-1)
- MANUFACTURER: USFRP
- COLOR: BRIGHT WHITE
- TYPE: CLASS-A (PEBBLED)

STAINLESS STEEL 1 (S STL-1)
REFER TO SPECS

GYPSUM CEILING (GC-1)
- MANUFACTURER:
- COLLECTION:
- COLOR: PT-1

MILDEW RESISTANT GYPSUM CEILING (GC-2)
- MANUFACTURER:
- COLLECTION:
- COLOR: PT-1

KEYNOTES

200	60" PROPANE RANGE
203	WALL MOUNTED FLAT SCREEN TV
206	FIRE EXTINGUISHER
226	REFRIGERATOR (BY OWNER)
235	UNDERCOUNTER ICE MACHINE
252	24" DISHWASHER - RE: SPECS
440	COMMERCIAL KITCHEN HOOD

PROFESSIONAL SEAL

LOGO/CONTACT

martinez ARCHITECTS

Martinez Architect, LP
8911 N Capital of Texas Hwy
Suite 4200
Austin, TX 78759
737.900.5166

DESIGN TEAM

Architectural
Martinez Architects

Civil
Hill Country Civil

Landscape
Evergreen Landscape Group

Structural
Matrix Structural

MEP
Emerald MEP

Technology
Imagine IT

Alerting
WestNET

STATION #42

Hays County ESD #4

xxxxx
Wimberley, TX 78676

PROJECT No: **MA 25016**
DATE: **20-OCT-2026**


ISSUE


6	IFB	20-OCT-2026
7	ADDENDUM 3	28-OCT-2026


3


KITCHEN PLANS

A-421

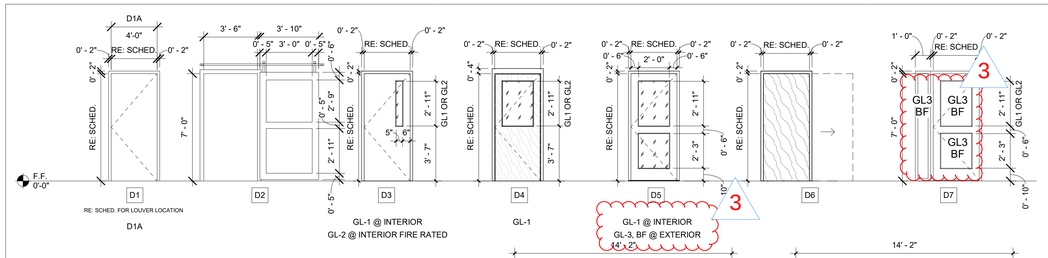

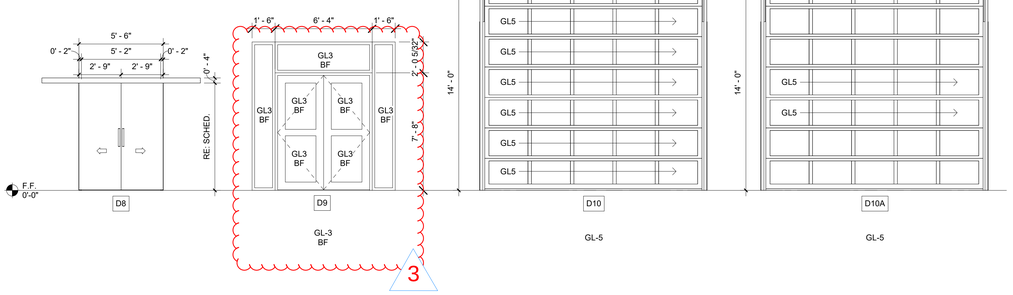

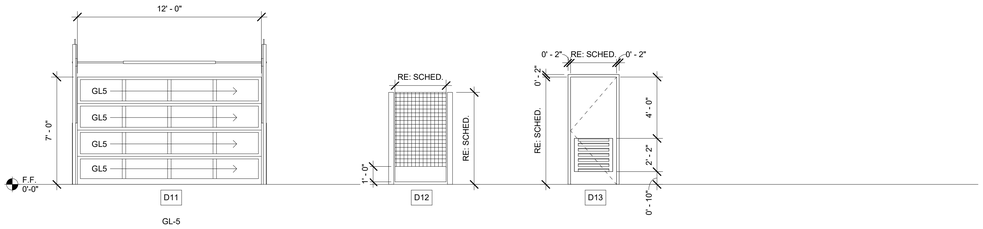

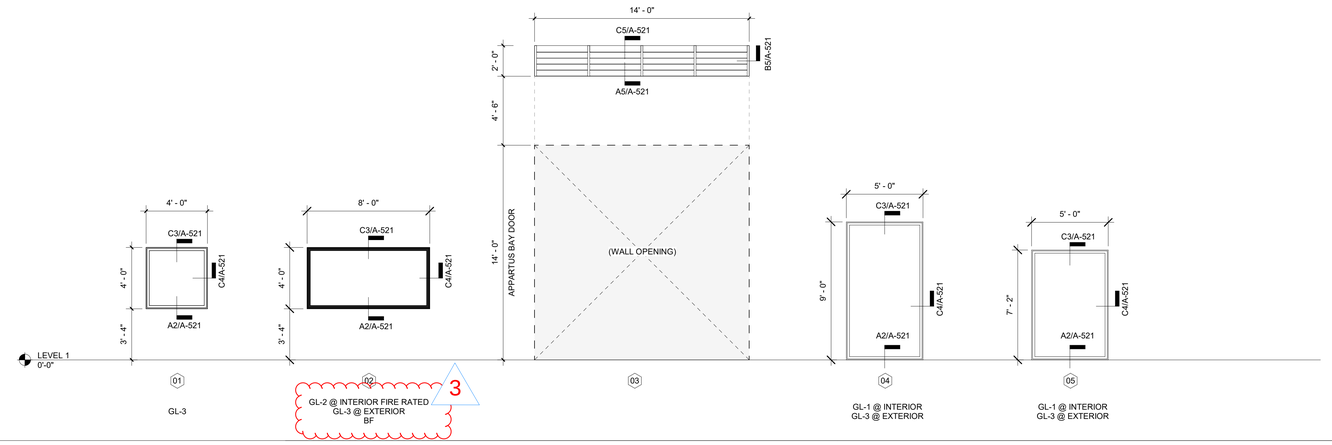

NOTES

1. ALL HOLLOW METAL DOOR FRAMES WILL BE PAINTED.
2. RE: SHEET A-521 & A-522 FOR DOOR & WINDOW DETAILS.
3. RE: SPEC. FOR DOOR HARDWARE.
4. RE: FLOOR PLANS FOR DOOR SWING INFORMATION
5. ALL INTERIOR WOOD DOORS TO RECEIVE PLASTIC LAMINATE FINISH U.N.O. REFER TO DOOR SCHEDULE.
6. ALL EXTERIOR DOORS TO BE FLUSH DOORS.
7. G.C. TO COORDINATE THE INSTALLATION OF PROXIMITY DEVICES. ALL AREAS SHOWN TO BE ROUGHED IN WITH ELECTRICAL AS PART OF BASE BID. COORDINATE REQUIREMENTS WITH PROXIMITY DEVICE VENDOR.
8. STOREFRONT DOORS TO BE WIDE STYLE DOOR TO ACCOMMODATE PANIC DEVICE INSTALLATION. COORDINATE WITH CONTRACTOR PRIOR TO FABRICATION.
9. ALL DOORS SHALL HAVE THICKNESS OF 1-3/4" U.N.O.
10. G.C. SHALL COORDINATE STRUCTURAL REQUIREMENTS W/ THE OVERHEAD DOOR SUB-CONTRACTOR PRIOR TO CONSTRUCTION.
11. G.C. SHALL COORDINATE ALL DOOR FINISHES W/ ARCHITECT
12. G.C. SHALL PROVIDE ARCHITECT PHYSICAL SAMPLES OF ALL DOOR FINISHES FOR FINAL APPROVAL
13. PROVIDE KICKPLATES AT ALL EXTERIOR, HIGH TRAFFIC, AND OPERATIONS DOORS. (REPAIR, SCBA, GEAR STORAGE, ETC.)

GLAZING LEGEND

GL1: 1/4" CLEAR GLASS (TEMPERED)
GL2: 1/4" CLEAR GLASS (FIRE RATED)
GL3: 1" TINTED INSULATED GLASS (TEMPERED)
GL4: 1" TINTED INSULATED GLASS (FIRE RATED)
GL5: 1/4" CLEAR ACRYLIC
BF: ONE-WAY BALLISTIC FILM

3

DOOR SCHEDULE

DOOR TAG	DOOR TYPE	SIZE W	SIZE H	DOOR CONSTRUCTION		DETAILS			FIRE RATING	HARDWARE SET	DOOR REMARKS
				DOOR PANEL	DOOR FRAME	JAMB	SILL	HEAD			
100A	D9	6' - 0"	7' - 6"	ALUM	ALUM					C714A	CARD READER, PANIC BAR, KEYED
100B	D4	3' - 0"	7' - 0"	P-LAM ON WOOD	HOLLOW METAL				-	C711A	CARD READER, PANIC BAR
101A	D1	3' - 0"	7' - 0"	P-LAM ON WOOD	HOLLOW METAL				-	341	
102A	D1	3' - 0"	7' - 0"	P-LAM ON WOOD	HOLLOW METAL				-	403	
103A	D1	3' - 0"	7' - 0"	HOLLOW METAL	HOLLOW METAL				-	715.1	KEYED, KNOX,
104A	D4	3' - 0"	7' - 0"	P-LAM ON WOOD	HOLLOW METAL				-	103	KEYED
105A	D5	3' - 0"	7' - 0"	P-LAM ON WOOD	HOLLOW METAL				-	303	
106A	D4	3' - 0"	7' - 0"	P-LAM ON WOOD	HOLLOW METAL				-	103	KEYED
107A	D1	3' - 0"	7' - 0"	P-LAM ON WOOD	HOLLOW METAL				-	401	
108A	D6	3' - 6"	7' - 0"	P-LAM ON WOOD	HOLLOW METAL				-	923	
109A	D5	3' - 0"	7' - 0"	ALUM	ALUM				-	C715A	CARD READER, PANIC BAR, KEYED
110A	D5	3' - 0"	7' - 0"	ALUM	ALUM				-	C715A	CARD READER, PANIC BAR, KEYED
111A	D2	3' - 6"	7' - 0"	P-LAM ON WOOD	HOLLOW METAL					903	
112A	D2	3' - 6"	7' - 0"	P-LAM ON WOOD	HOLLOW METAL					903	
113A	D2	3' - 6"	7' - 0"	P-LAM ON WOOD	HOLLOW METAL					903	
114A	D1	3' - 0"	7' - 0"	P-LAM ON WOOD	HOLLOW METAL				-	203	
115A	D1	3' - 0"	7' - 0"	P-LAM ON WOOD	HOLLOW METAL				-	C201	CARD READER, KEYED
116A	D1	3' - 0"	7' - 0"	P-LAM ON WOOD	HOLLOW METAL				-	347	
117A	D1	3' - 0"	7' - 0"	P-LAM ON WOOD	HOLLOW METAL				-	303	
117B	D6	3' - 0"	7' - 0"	P-LAM ON WOOD	HOLLOW METAL				-	923	
118A	D1	3' - 0"	7' - 0"	P-LAM ON WOOD	HOLLOW METAL				-	303	
118B	D6	3' - 0"	7' - 0"	P-LAM ON WOOD	HOLLOW METAL				-	923	
119A	D1	3' - 0"	7' - 0"	P-LAM ON WOOD	HOLLOW METAL				-	303	
120A	D1	3' - 0"	7' - 0"	P-LAM ON WOOD	HOLLOW METAL				-	303	
121A	D4	3' - 0"	7' - 0"	P-LAM ON WOOD	HOLLOW METAL				-	403	
122A	D3	3' - 0"	7' - 0"	P-LAM ON WOOD	HOLLOW METAL				-	731	PANIC BAR
122B	D3	3' - 0"	7' - 0"	HOLLOW METAL+GLAZING	HOLLOW METAL				20 MIN	C711CGR	CARD READER, PANIC BAR, KEYED
123A	D1	3' - 0"	7' - 0"	P-LAM ON WOOD	HOLLOW METAL				-	303	
124A	D1	3' - 0"	7' - 0"	P-LAM ON WOOD	HOLLOW METAL				-	303	
125A	D1	3' - 0"	7' - 0"	P-LAM ON WOOD	HOLLOW METAL				-	347	
126A	D3	3' - 0"	7' - 0"	P-LAM ON WOOD	HOLLOW METAL				-	731	PANIC BAR
126B	D3	3' - 0"	7' - 0"	HOLLOW METAL+GLAZING	HOLLOW METAL				20 MIN	C711GR	CARD READER, PANIC BAR, KEYED
126D	D12	3' - 0"	6' - 0"							JK715X.1	KNOX, PANIC BAR, KICK PLATE
127A	D1	3' - 0"	7' - 0"	P-LAM ON WOOD	HOLLOW METAL				-	347	
128A	D1	3' - 0"	7' - 0"	P-LAM ON WOOD	HOLLOW METAL				-	303	
129A	D1	3' - 0"	7' - 0"	P-LAM ON WOOD	HOLLOW METAL				-	303	
130A	D1	3' - 0"	7' - 0"	P-LAM ON WOOD	HOLLOW METAL				-	303	
131A	D1	3' - 0"	7' - 0"	P-LAM ON WOOD	HOLLOW METAL				-	303	
132A	D1	3' - 0"	7' - 0"	P-LAM ON WOOD	HOLLOW METAL				-	303	
133A	D1	3' - 0"	7' - 0"	P-LAM ON WOOD	HOLLOW METAL				-	303	
134A	D1	3' - 0"	7' - 0"	P-LAM ON WOOD	HOLLOW METAL				-	347	
135A	D7	3' - 0"	7' - 0"	ALUM	ALUM				-	C715A	CARD READER, PANIC BAR, KEYED
135B	D7	3' - 0"	7' - 0"	ALUM	ALUM				-	C715A	CARD READER, PANIC BAR, KEYED
136A	D8	10' - 4"	7' - 4"	[illegible]OLLOW METAL	HOLLOW METAL					902	
137A	D13	3' - 0"	7' - 0"	[illegible]LLOW METAL	HOLLOW METAL				-	501C	
138A	D2	3' - 0"	7' - 0"	[illegible]METAL+GLAZING	HOLLOW METAL					401	
138N	D1	12' -0"	07' -0"						-	001	
139A	D10	14' -0"	14' -0"						-	001	
139B	D10	14' -0"	14' -0"						-		
139C	D10	14' -0"	14' -0"						-	001	
139D	D10	14' -0"	14' -0"						-	001	
139E	D10	14' -0"	14' -0"						-	001	
139F	D10A	14' -0"	14' -0"						-	001	
139G	D10A	14' -0"	14' -0"						-	001	
139H	D10A	14' -0"	14' -0"						-	001	
139I	D10A	14' -0"	14' -0"						-	001	
138J	D7	3' - 0"	7' - 0"	HOLLOW METAL	HOLLOW METAL				-	C715	CARD READER, PANIC BAR, KEYED
139K	D7	3' - 0"	7' - 0"	HOLLOW METAL	HOLLOW METAL				-	C715	CARD READER, PANIC BAR, KEYED
145A	D7	3' - 0"	7' - 0"	HOLLOW METAL	HOLLOW METAL				-	203S	KEYED
147A	D1	3' - 0"	7' - 0"	HOLLOW METAL	HOLLOW METAL				-	C201	CARD READER, KEYED
149A	D1A	4' - 0"	6' - 0"	HOLLOW METAL	HOLLOW METAL				20 MIN	201SW	KEYED
152A	D1A	4' - 0"	7' - 0"	HOLLOW METAL	HOLLOW METAL					205W-C	KEYED, STORAGE FUNCTION

PROFESSIONAL SEAL

REGISTERED ARCHITECT JAMES J. MARTINEZ 23149 STATE OF TEXAS

LOGO/CONTACT

martinez ARCHITECTS

Martinez Architect, LP
8911 N Capital of Texas Hwy
Suite 4200
Austin, TX 78759
737.900.5166

DESIGN TEAM

Architectural
Martinez Architects

Civil
Hill Country Civil

Landscape
Evergreen Landscape Group

Structural
Matrix Structural

MEP
Emerald MEP

Technology
Imagine IT

Alerting
WestNET

STATION #42

Hays County ESD #4
xxxxx
Wimberley, TX 78676

PROJECT No: **MA 25016**
DATE: **20-OCT-2026**

ISSUE

1	100% DD	06-JAN-2026
2	25% CD	25-FEB-2026
3	75% CD	06-APR-2026
4	98% CD	04-MAY-2026
5	IFP	01-JUN-2026
6	IFB	20-OCT-2026
7	ADDENDUM 3	28-OCT-2026

DOOR, WINDOW & LOUVER SCHEDULES

A-601

FINISH SCHEDULE

		FLOOR						BASE			WALL						CEILING FNIISHES					
#	ROOM NAME	SEALED CONCRETE (SC-1)	FLOOR TILE - 1 (FT-1)	FLOOR TILE - 2 (FT-2) NOT USED	LUXURY VINYL TILE - 1 (LVT-1)	LUXURY VINYL TILE - 2 (LVT-2)	RUBBER FLOORING (RF-1)	VULCANIZED RUBBER COVER BASE	NOT USED	NOT USED PORCALAIN TILE COVE BASE	PAINT ON GYP BD. (FIELD COLOR PT-1)	PAINT ON GYP. BD (PT-2)	PAINT ON GYP. BD. (PT-3) NOT USED	WALL TILE-1	WALL TILE-2	WALL TILE-3 NOT USED	METAL PANEL-1 NOT USED	FRP-1	TEGULAR EDGED LAY-IN ACOUSTICAL PANEL (WHITE)	MILDEW RESISTANT TEGULAR EDGED LAY-IN ACOUSTICAL PANEL (WHITE)	PAINTED GYPSUM BOARD	EXPOSED CEILING	SCRUBBABLE MILDEW RESISTANT GYPSUM BOARD	HEIGHT	FINISH REMARKS
100	ENTRY				X			X			X	X							X					10' - 0"	
101	ADA RR		X								X			X	X					X			X	9' - 0"	CEMENT BOARD @ SHOWER CEILING
102	EXAM		X								X			X	X					X				9' - 0"	
103	RISER	X									X											X			
104	OFFICE				X			X			X	X							X					9' - 0"	
105	CONFERENCE				X			X			X	X							X					9' - 0"	
106	OFFICE				X			X			X	X							X					9' - 0"	
107	UTILITY				X			X			X	X								X				9' - 0"	
108	TV ROOM				X			X			X	X							X					9' - 0"	
109	DAYROOM				X	X		X			X	X									X			10' - 0"	
110	KITCHEN				X			X			X	X		X							X		X	10' - 0"	
111	PANTRY				X			X			X	X							X					9' - 0"	
112	PANTRY				X			X			X	X							X					9' - 0"	
113	PANTRY				X			X			X	X							X					9' - 0"	
114	STORAGE				X			X			X								X					9' - 0"	
115	EMS STORAGE				X			X			X									X				9' - 0"	
116	ADA RR		X								X			X	X					X			X	9' - 0"	CEMENT BOARD @ SHOWER CEILING
117	OFFICER DORM				X			X			X	X							X					9' - 0"	
118	OFFICER DORM				X			X			X	X							X					9' - 0"	
119	DORM				X			X			X	X							X		X			9' - 0"	GYP @ FURRDOWN
120	DORM				X			X			X	X							X		X			9' - 0"	GYP @ FURRDOWN
121	WATCH OFFICE				X			X			X	X							X					9' - 0"	
122	APP BAY VESTIBULE	X						X			X								X					9' - 0"	
123	DORM				X			X			X	X							X		X			9' - 0"	GYP @ FURRDOWN
124	DORM				X			X			X	X							X		X			9' - 0"	GYP @ FURRDOWN
125	RR		X								X			X	X					X			X	9' - 0"	CEMENT BOARD @ SHOWER CEILING
126	APP BAY VESTIBULE	X						X			X								X					9' - 0"	
127	RR		X								X			X	X					X			X	9' - 0"	CEMENT BOARD @ SHOWER CEILING
128	DORM				X			X			X	X							X		X			9' - 0"	GYP @ FURRDOWN
129	DORM				X			X			X	X							X		X			9' - 0"	GYP @ FURRDOWN
130	DORM				X			X			X	X							X		X			9' - 0"	GYP @ FURRDOWN
131	DORM				X			X			X	X							X		X			9' - 0"	GYP @ FURRDOWN
132	DORM				X			X			X	X							X		X			9' - 0"	GYP @ FURRDOWN
133	DORM				X			X			X	X							X		X			9' - 0"	GYP @ FURRDOWN
134	RR		X								X			X	X					X			X	9' - 0"	CEMENT BOARD @ SHOWER CEILING
135	HALLWAY				X			X			X	X							X					9' - 6"	
136	PPE	X						X			X	X										X		9' - 0"	
137	SCBA	X						X			X	X										X		9' - 0"	
138	FITNESS						X	X			X	X						X				X			
139	APP BAY	X						X			X											X			PAINTED STRUCTURE & MEP SYSTEMS TO MATCH ROOF PANEL FINISH
145	UTILITY	X						X			X											X			
146	OPEN PLATFORM	X						X			X											X			
147	IT/ELEC	X						X			X											X			
149	MECH PLATFORM	X						X			X											X			
152	PUMPHOUSE	X																				X			

GENERAL NOTES

NOTES

1. ALL FINISH MATERIAL COLORS/PATTERNS/STYLES TO BE DETERMINED BY ARCHITECT FROM MANUFACTURER'S FULL RANGE OF COLORS. ALL HOLLOW METAL DOOR FRAMES SHALL BE PAINTED.
2. RE: SPECIFICATIONS FOR ADDITIONAL FINISH INFORMATION & REQUIREMENTS.
3. ALL EXPOSED STEEL FRAMING (INTERIOR & EXTERIOR) SHALL BE PAINTED.
4. PROVIDE CORNER GUARDS AT ALL OUTSIDE GYP. BD. CORNERS
5. ALL CABINETS SHALL BE WOOD LAMINATED U.N.O.
6. ALL COUNTERTOPS SHALL BE SOLID SURFACE U.N.O.
7. RE: A701 FOR EXTENT AND HEIGHT OF CEILING FURRDOWNS / TRANSITIONS.
8. NO WALL BASE AT INTERIOR MASONRY WALLS
9. MEP AND STRUCTURAL SYSTEMS SHALL BE PAINTED IN ALL EXPOSED CEILING AREAS

INTERIOR FINISHES

FLOOR

LUXURY VINYL TILE 1 (LVT-1)
- MANUFACTURER: TARKETT
- COLLECTION: EVENT + WOOD
- MODEL: CRAFTED PLANK
- SIZE: 6" X 48"
- COLOR: PACIFIC WALNUT

LUXURY VINYL TILE 2 (LVT-2)
- MANUFACTURER: TARKETT
- COLLECTION: EVENT + WOOD
- MODEL: CRAFTED PLANK
- SIZE: 6" X 48"
- COLOR: ANTIQUE WALNUT

FLOOR TILE 1 (FT-1)
- MANUFACTURER: DALTILE
- COLLECTION: NATURAL STONE MARBLE
- MODEL: FIRST SNOW ELEGANCE SQUARE
- SIZE: 12" X 12"
- COLOR: M190

RUBBER FLOORING (RF-1)
- MANUFACTURER: FLEXCO
- COLLECTION: PRIME SPORTS
- MODEL: STARLIGHT PSF-204 RUBBER TILE
- SIZE: 3/8" GAUGE
- COLOR: BLACK W/ RED

SEALED CONCRETE (SC-1)
(RE: SPECS)

MILLWORK

PLASTIC LAMINATE 1 (PL-1)
- MANUFACTURER: WILSONART
- COLOR: 72, 60, 48
- NAME: FREMONT OAK

PLASTIC LAMINATE 2 (PL-2)
- MANUFACTURER: WILSONART
- COLOR: 169, 158, 139
- NAME: HARBOR HICKORY

PLASTIC LAMINATE 3 (PL-3)
- MANUFACTURER: WILSONART
- COLOR: 154, 137, 118
- NAME: FRENCH PEAR

COUNTER TOP 1 (CTOP-1)
- MANUFACTURER: WILSONART
- COLOR: 243, 248, 243
- NAME: DESIGNER WHITE D354SL

GRANITE COUNTER TOP (CTOP-2)
- (RE: CONTRACTOR)
- CONTRACTOR FURNISHED, CONTRACTOR INSTALLED

WALL

WALL PAINT 1 (WP-1) | FIELD PAINT
- MANUFACTURER: SHERWIN WILLIAMS
- COLOR: 231 / 216 / 189
- NAME: ROYCROFT VELLUM - SW 2833

WALL PAINT 2 (WP-2)
- MANUFACTURER: SHERWIN WILLIAMS
- COLOR: 193 / 164 / 133
- NAME: FARRO - SW 9103

WALL TILE 1 (WT-1)
- MANUFACTURER: DALTILE
- COLLECTION: FONTE
- MODEL: PIER WHITE
- SIZE: 12" X 24"
- COLOR: M012
- PATTERN: RECTANGLE

WALL TILE 2 (WT-2)
- MANUFACTURER: DALTILE
- TYPE: REMEDY
- MODEL: TONIC
- COLOR: RD26
- SIZE: 1" X 10"
- PATTERN: RECTANGLE

WALL BASE 1 (WB-1)
- MANUFACTURER: ROPPE / 700 SERIES
- COLOR: 52 / 35 / 32
- NAME: 110 BROWN

HM DOOR PAINT 1 (MTL-1)
- MANUFACTURER: SHERWIN WILLIAMS
- COLOR: 79 / 52 / 38
- NAME: FRENCH ROAST - SW 6069

FIBER REINFORCED PLASTIC (FRP-1)
- MANUFACTURER: USFRP
- COLOR: BRIGHT WHITE
- TYPE: CLASS-A (PEBBLED)

STAINLESS STEEL 1 (S STL-1)
REFER TO SPECS

CEILING

2 X 2 DROP CEILING MILDEW RESISTANT (DC-1)
- MANUFACTURER:
- COLLECTION:
- COLOR:

GYPSUM CEILING (GC-1)
- MANUFACTURER:
- COLLECTION:
- COLOR: PT-1

2 X 2 DROP CEILING (DC-2)
- MANUFACTURER:
- COLLECTION:
- COLOR:

MILDEW RESISTANT GYPSUM CEILING (GC-2)
- MANUFACTURER:
- COLLECTION:
- COLOR: PT-1

LEGEND

PROFESSIONAL SEAL

LOGO/CONTACT

martinez ARCHITECTS

Martinez Architect, LP
8911 N Capital of Texas Hwy
Suite 4200
Austin, TX 78759
737.900.5166

DESIGN TEAM

Architectural
Martinez Architects

Civil
Hill Country Civil

Landscape
Evergreen Landscape Group

Structural
Matrix Structural

MEP
Emerald MEP

Technology
Imagine IT

Alerting
WestNET

STATION #42

Hays County ESD #4

xxxxx
Wimberley, TX 78676


PROJECT No: **MA 25016**
DATE: **20-OCT-2026**

ISSUE

1	100% DD	06-JAN-2026
2	25% CD	25-FEB-2026
3	75% CD	06-APR-2026
4	98% CD	04-MAY-2026
5	IFP	01-JUN-2026
6	IFB	20-OCT-2026
7	ADDENDUM 3	28-OCT-2026


ROOM FINISH SCHEDULE

A-621




NOTE: REFER TO SPECS FOR ADDITIONAL DETAILS.

D1 DEDICATION PLAQUE
SCALE: 1 1/2" = 1'-0"

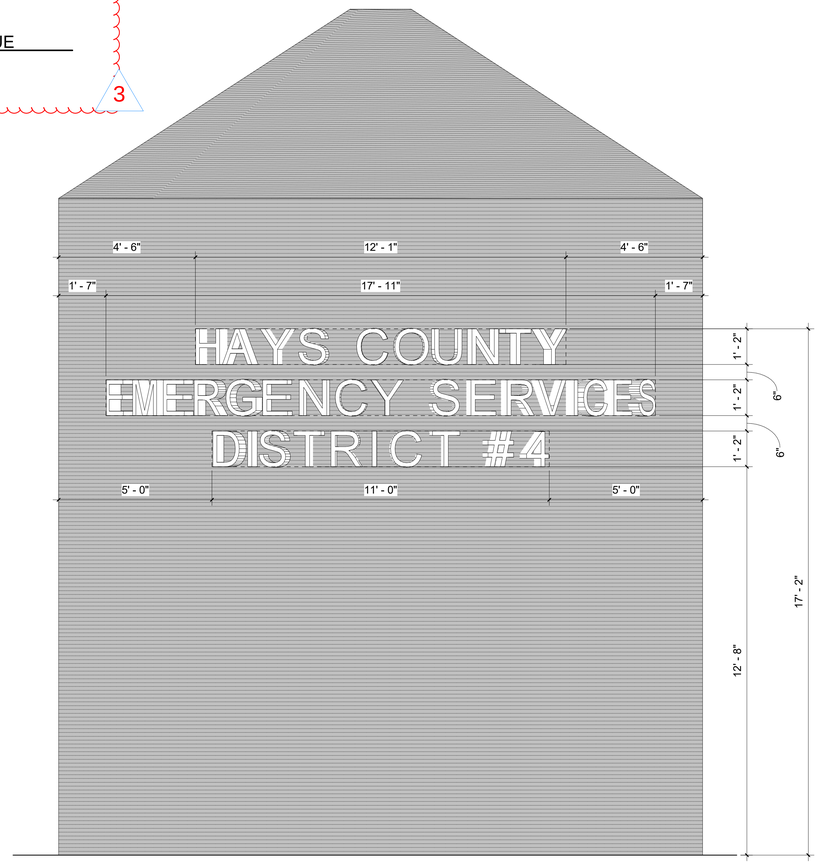


B1 WATER TANK SIGNAGE ELEVATION
SCALE: 1/2" = 1'-0"

SIGNAGE SCHEDULE					
ARCH ROOM #	ARCH ROOM NAME	NAME ON SIGN	ROOM # ON SIGN	SIGN TYPE	SIGN REMARKS
	PUMPHOUSE				
100	ENTRY				
101	ADA RR	RESTROOM	101	S1	
102	EXAM	EXAM ROOM	102	S1	
103	RISER	FIRE RISER ROOM	103	S3	
104	OFFICE	OFFICE	104	S2	
105	CONFERENCE	CONFERENCE	105	S2	
106	OFFICE	OFFICE	106	S2	
107	UTILITY	UTILITY ROOM	107	S2	
108	TV ROOM	TV ROOM	108	S2	
109	DAYROOM				
110	KITCHEN				
111	PANTRY	PANTRY	111	S2	
112	PANTRY	PANTRY	112	S2	
113	PANTRY	PANTRY	113	S2	
114	STORAGE	STORAGE	114	S2	
115	EMS STORAGE	EMS STORAGE	115	S2	
116	ADA RR	RESTROOM	116	S1	
117	OFFICER DORM	OFFICER DORM	117	S2	
118	OFFICER DORM	OFFICER DORM	118	S2	
119	DORM	DORM	119	S2	
120	DORM	DORM	120	S2	
121	WATCH OFFICE	WATCH OFFICE	121	S2	
122	APP BAY VESTIBULE	APPARATUS AIRLOCK	122	S2	
123	DORM	DORM	123	S2	
124	DORM	DORM	124	S2	
125	RR	RESTROOM	125	S1	
126	APP BAY VESTIBULE	APPARATUS AIRLOCK	126	S2	
127	RR	RESTROOM	127	S1	
128	DORM	DORM	128	S2	
129	DORM	DORM	129	S2	
130	DORM	DORM	130	S2	
131	DORM	DORM	131	S2	
132	DORM	DORM	132	S2	
133	DORM	DORM	133	S2	
134	RR	RESTROOM	134	S1	
135	HALLWAY				
136	PPE	GEAR STORAGE	136	S2	
137	SCBA	SCBA	137	S2	
138	FITNESS	FITNESS	138	S2	
139	APP BAY	APPARATUS BAY	139	S2	
145	UTILITY	UTILITY ROOM	145	S2	
146	OPEN PLATFORM				
147	IT/ELEC	IT/ELECTRICAL	147	S2	
149	MECH PLATFORM	MECHANICAL	149	S2	

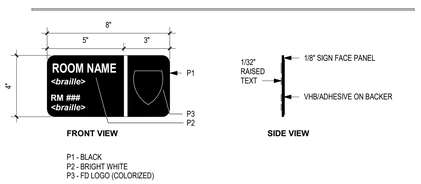

B4 SIGNAGE TYPE "S2"
SCALE: N.T.S.




FIRE PROTECTION LAYOUT AND ID


FIRE DEPARTMENT CONNECTION SIGN:

1. FIRE DEPARTMENT CONNECTION SHALL BE INSTALLED WITHIN 150' OF FIRE HYDRANT AND INSTALLED CLEARLY VISIBLE FROM A PUBLIC ACCESS STREET
2. SIGN PLATE SHALL BE MADE OF RUST-FREE ALUMINUM WITH UV RESISTANT, TWO-SIDED POLYESTER COATING.
3. THE SIGN PLATE SHALL BE A MINIMUM OF 12"x14" WITH A THICKNESS OF 0.40".
4. FDC LETTERING TO BE 6" HIGH
5. ADDRESS LETTERING TO BE 1.25" HIGH


B5 SIGNAGE TYPE "S3"
SCALE: N.T.S.




A1 EXTERIOR SIGNAGE DETAIL
SCALE: 3/4" = 1'-0"

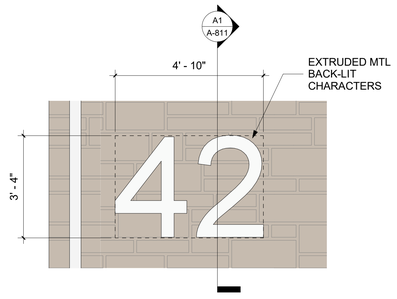

A3 ENLARGED FD NUMBER ELEVATION
SCALE: 1/2" = 1'-0"

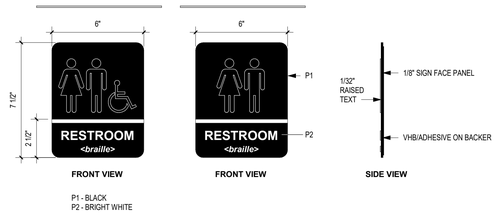

A4 SIGNAGE TYPE "S1"
SCALE: N.T.S.



A5 SIGNAGE TEXT HEIGHT
SCALE: N.T.S.

PROFESSIONAL SEAL

REGISTERED ARCHITECT RICHARD J. MARTINEZ 23149 STATE OF TEXAS

LOGO/CONTACT

martinez ARCHITECTS

Martinez Architect, LP
8911 N Capital of Texas Hwy
Suite 4200
Austin, TX 78759
737.900.5166

DESIGN TEAM

Architectural
Martinez Architects

Civil
Hill Country Civil

Landscape
Evergreen Landscape Group

Structural
Matrix Structural

MEP
Emerald MEP

Technology
Imagine IT

Alerting
WestNET

STATION #42

Hays County ESD #4
xxxxx
Wimberley, TX 78676

PROJECT No: **MA 25016**
DATE: **20-OCT-2026**

ISSUE

1	100% DD	06-JAN-2026
2	25% CD	25-FEB-2026
3	75% CD	06-APR-2026
4	98% CD	04-MAY-2026
5	IFP	01-JUN-2026
6	IFB	20-OCT-2026
7	ADDENDUM 3	28-OCT-2026

SIGNAGE DETAILS

A-811